

Carrier

40 LMA Product Data

50Hz Chilled Water Fan Coil Unit

7.3kW ~ 26.5kW

40 LMA

CHILLED WATER FAN COIL UNIT

with

EC MOTOR OPTION



The World Leading Air-conditioning Company

Table of Contents

DESCRIPTIONS	PAGE
Model Number Nomenclature	2
Features & Benefits	3
Physical Dimension	5
Performance Data	6
Fan Performance Curve (4 Row)	
- 40LMA024 with AC Motor	
- 40LMA040 with AC Motor	
Performance Data	7
Fan Performance Curve (4 Row)	
- 40LMA060 with AC Motor	
- 40LMA080 with AC Motor	
Performance Data	8
Fan Performance Curve (6 Row)	
- 40LMA024 with AC Motor	
- 40LMA040 with AC Motor	
Performance Data	9
Fan Performance Curve (6 Row)	
- 40LMA060 with AC Motor	
- 40LMA080 with AC Motor	
Performance Data	10
Fan Performance Curve (4 Row)	
- 40LMA024 with EC Motor	
- 40LMA040 with EC Motor	
Performance Data	11
Fan Performance Curve (4 Row)	
- 40LMA060 with EC Motor	
- 40LMA080 with EC Motor	
Performance Data	12
Fan Performance Curve (6 Row)	
- 40LMA024 with EC Motor	
- 40LMA040 with EC Motor	
Performance Data	13
Fan Performance Curve (6 Row)	
- 40LMA060 with EC Motor	
- 40LMA080 with EC Motor	
Performance Data	14
Coil Pressure Drop (4 Row)	
- 40LMA024 with AC & EC Motor	
- 40LMA040 with AC & EC Motor	
- 40LMA060 with AC & EC Motor	
- 40LMA080 with AC & EC Motor	

DESCRIPTIONS	PAGE
Performance Data	15
Coil Pressure Drop (6 Row)	
- 40LMA024 with AC & EC Motor	
- 40LMA040 with AC & EC Motor	
- 40LMA060 with AC & EC Motor	
- 40LMA080 with AC & EC Motor	
Performance Data	16
Chilled Water Coils (4 Row)	
- 40LMA024 with AC & EC Motor	
- 40LMA040 with AC & EC Motor	
Performance Data	17
Chilled Water Coils (4 Row)	
- 40LMA060 with AC & EC Motor	
- 40LMA080 with AC & EC Motor	
Performance Data	18
Chilled Water Coils (6 Row)	
- 40LMA024 with AC & EC Motor	
- 40LMA040 with AC & EC Motor	
Performance Data	19
Chilled Water Coils (6 Row)	
- 40LMA060 with AC & EC Motor	
- 40LMA080 with AC & EC Motor	
Performance Data	20
Hot Water Coils (1 Row, 2 Circuit)	
- 40LMA024 with AC & EC Motor	
- 40LMA040 with AC & EC Motor	
Performance Data	21
Hot Water Coils (1 Row, 2 Circuit)	
- 40LMA060 with AC & EC Motor	
- 40LMA080 with AC & EC Motor	
Sound Pressure Level	22
- 40LMA with AC Motor	
- 40LMA with EC Motor	
Electrical Data	23
- 40LMA with AC Motor	
- 40LMA with EC Motor	
- Typical Motor Power Input Comparison	
Guide Specifications	24
- Coils	
- Casing	
- Fan	
- Serviceability	
- Sound	
- Filter Accessory	
Guide Specifications	25
- Motor AC	
- Motor EC	

Module Number Nomenclature

4 0 L M A 0 2 4 - - - 7 0 0 2 5

UNIT SIZE

024
040
060
080

CONNECTION

Standard - Left Handling (LH)
R Right Handling (RH)
S LH + stainless steel drain pan
 Special **T** RH + stainless steel drain pan

UNIT VERSION

0 - Unit with AC Motor
E - Unit with EC Motor

FILTER OPTIONS

Standard - Without filter track media
 Special **A** Half inch filter
1 1 inch filter

COIL TYPE

Standard - 4 row Chilled Water
 Special **6** 6 row Chilled Water
J 4R Chilled Water + 1R Hot Water
K 6R Chilled Water + 1R Hot Water



Fan Coil Selection Program

Please contact your Carrier's representative for a computer selection program which can help to finalize your selections, based on your "Quick Selection" plus the design parameter of your applications

Features & Benefits

Any room, every room flexibility in an air conditioning system.

This range of 40LMA Fan Coil Units are designed to be used with chilled and optional hot water. These units incorporate high performance qualities and versatility with space saving advantages.

The 40LMA units have a clean appearance and are designed with flexibility in mind. This allows for almost any plant room configuration or ceiling space application. A nominal cooling capacity range of 7 kW to 26 kW is available for the 40LMA units.

All units have forward curved direct drive fans. These are purposely selected to maintain the lowest possible fan outlet velocity, whilst ensuring the selection point remains in the stable operating area of the fan curve. This guarantees the customer a quiet and stable air distribution with predictable fan performance.

The standard unit is constructed from galvanized steel with 25mm polyurethane of 20kg/m³ density laminated with aluminium foil heat seal insulation. This type of insulation will protect the unit from excessive noise and thermal bridging.

Standard Features

- ☑ 4 row cooling coils.
- ☑ Direct drive fans.
- ☑ 25mm aluminium foil faced PU lining.
- ☑ Condensate drain pan of powder coated galvanized steel and insulated with PE.
- ☑ Horizontal front configuration.
- ☑ Left or right piping connection available.
- ☑ Easy access panel – maximum serviceability


Optional Features

- ☑ 6 row cooling coils.
- ☑ Hot water coils.
- ☑ Return air filter media 12mm EU2 or 25mm EU3 add-on frame.
- ☑ Stainless steel condensate drain pan with PE insulation.
- ☑ EC Motor

Specifications


MODEL		40LMA024	4LMA040	40LMA060	40LMA080					
Coil	Chilled Water	Type	Copper Tube, Aluminium Fin							
		Nominal Capacity kW	7.3	10.5	12.0	14.9	17.7	20.5	23.6	26.5
		Btu/h	24,898	35,984	40,968	50,753	60,480	70,027	80,733	90,405
		Face Area m ²	0.19		0.29		0.33		0.43	
		No. of Rows	4	6	4	6	4	6	4	6
		Fin Type	Lanced Sine Wave Plate Fins							
		Fins/Meter	472							
		Type	Copper Tube, Aluminium Fin							
	Hot Water (Optional)	Nominal Capacity kW	10.1		17		21.5		28.6	
		Faced Area m ²	0.19		0.29		0.33		0.43	
		No. of Rows	1							
		Fin Type	Double Wavy Plate Fins							
		Fins/Meter	472							
	Air Flow Range l/s		400~600		600~800		800~1000		1000~1400	
Fan Motor	Type	Permanent Split Capacitor								
	Quantity	1								
	Power Output watt	315		462		750		800		
	Speed	3-Speed								
Power Source V-Ph-Hz		240-1-50								
Min~Max Voltage Volt		207~253								
Connection	Supply (Chilled Water)	25.4mm (1")								
	Return (Chilled Water)	25.4mm (1")								
	Drain	19mm (3/4") male NPT								
Dimension WxDxH mm	754 x 600 x 425	1090 x 600 x 425	1224 x 600 x 425	1556 x 600 x 425						
Operating Weight Kg		41.0	43.3	56.5	59.5	61.5	65.5	80.0	86.0	
EC Fan Motor Option	Type	Brushless DC Motor with Electronic Controller								
	Quantity	1								
	Power Output Watt	375				800				
	Full Load Amps	3.23				6.57				
	Speed	Multi Speed								

Physical Dimension

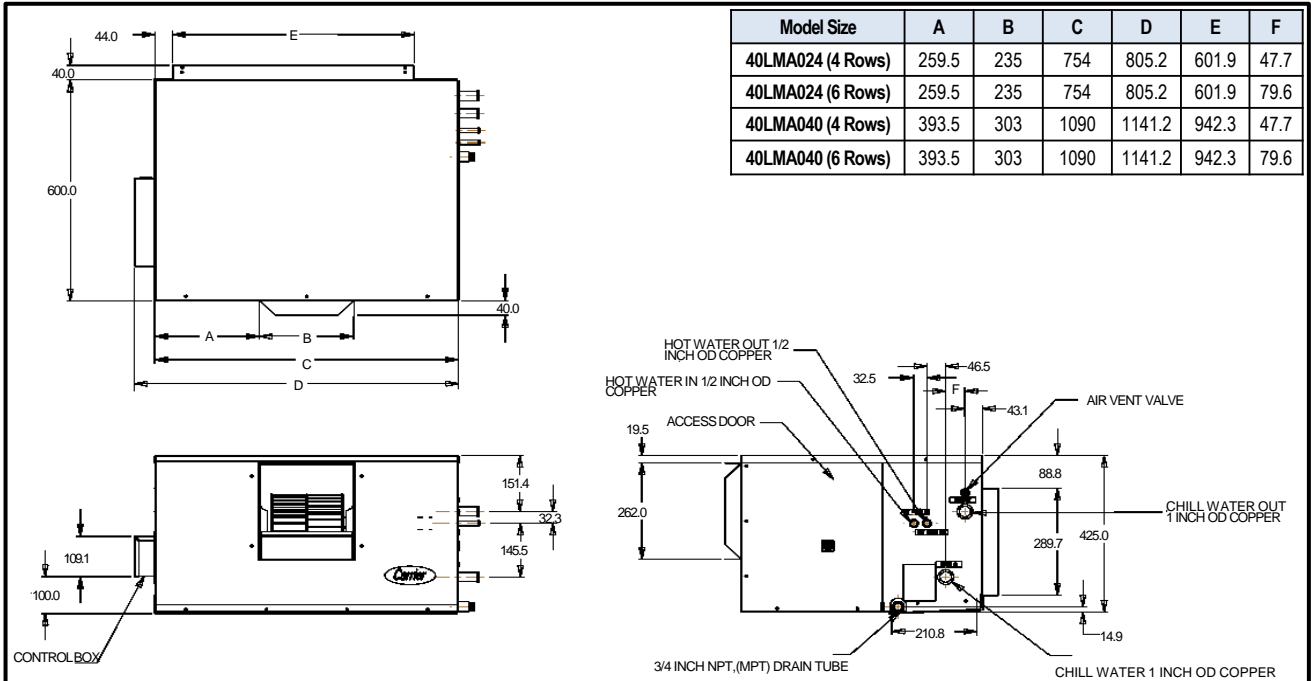

Note: All dimension in mm otherwise noted. Figure is showing unit with optional hot water heating coils.

Fig. 1 40LMA024/040 (4 or 6 row) Dimensional Drawing

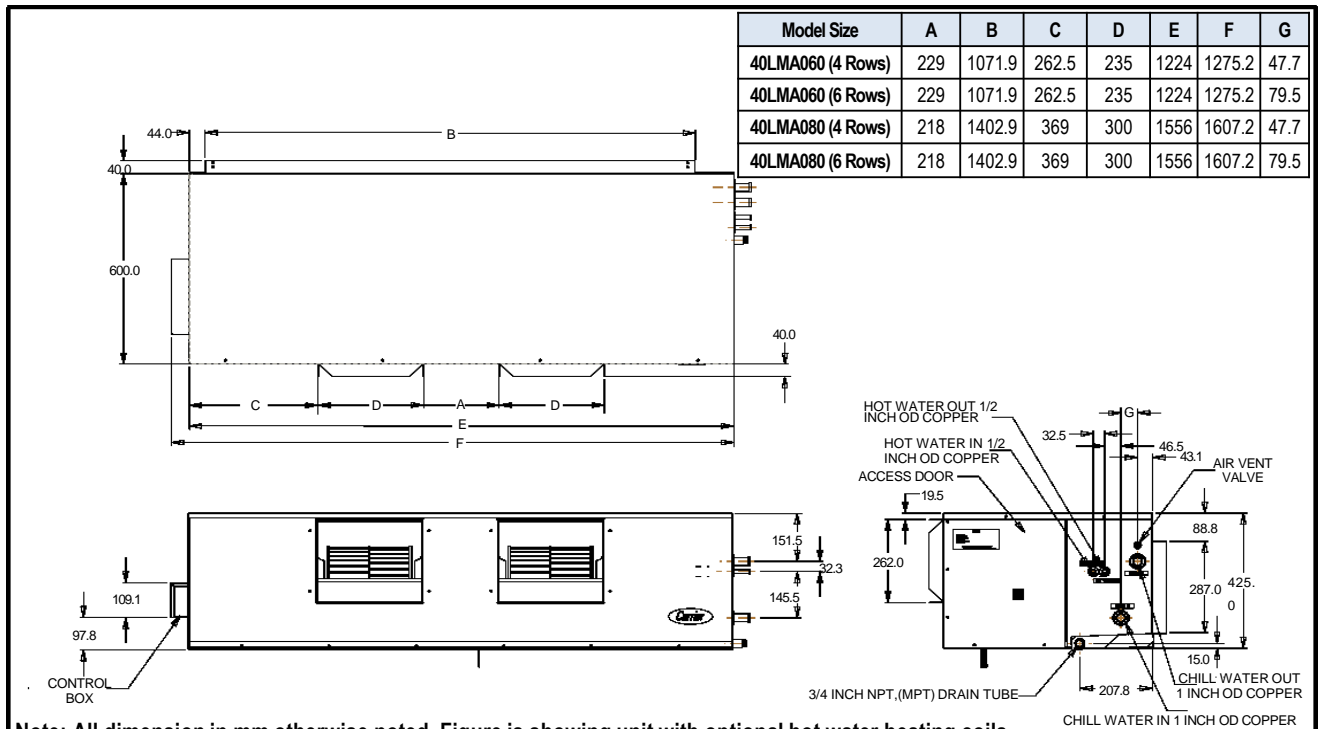


Note: All dimension in mm otherwise noted. Figure is showing unit with optional hot water heating coils.


Fig. 2 40LMA060/080 (4 or 6 row) Dimensional Drawing

Fan Performance Curves (4 Row)

40LMA024 with AC MOTOR

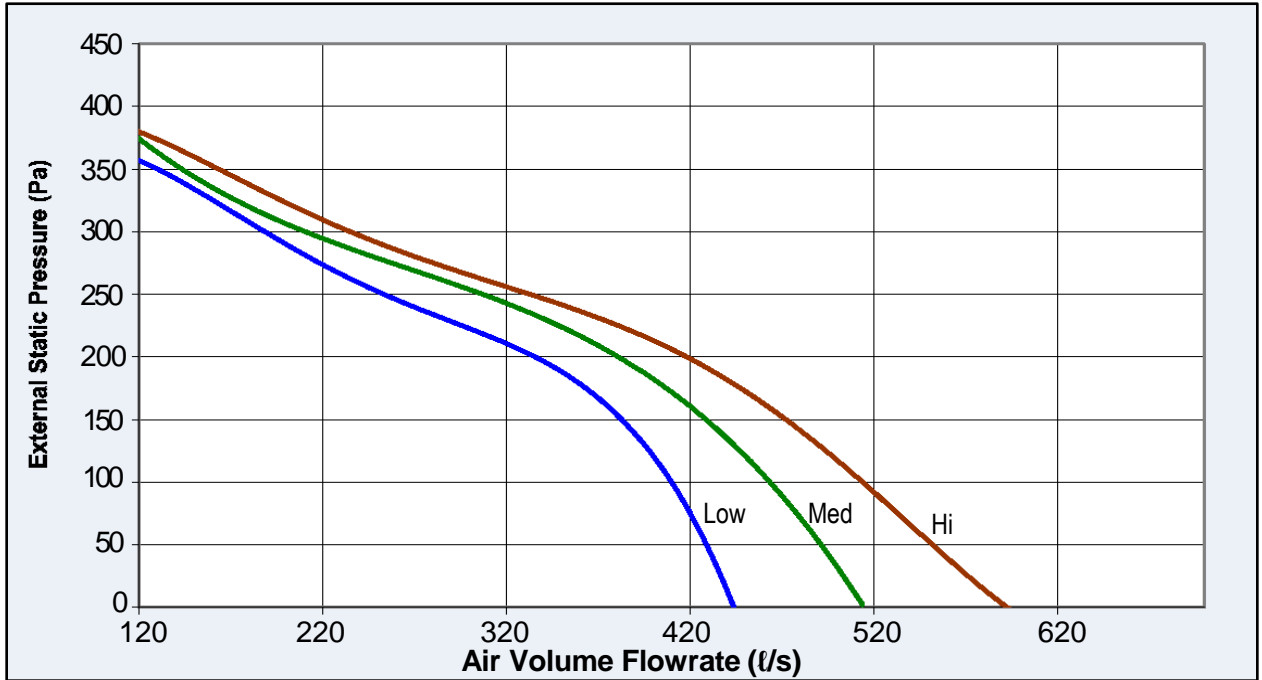

40LMA040 with AC MOTOR

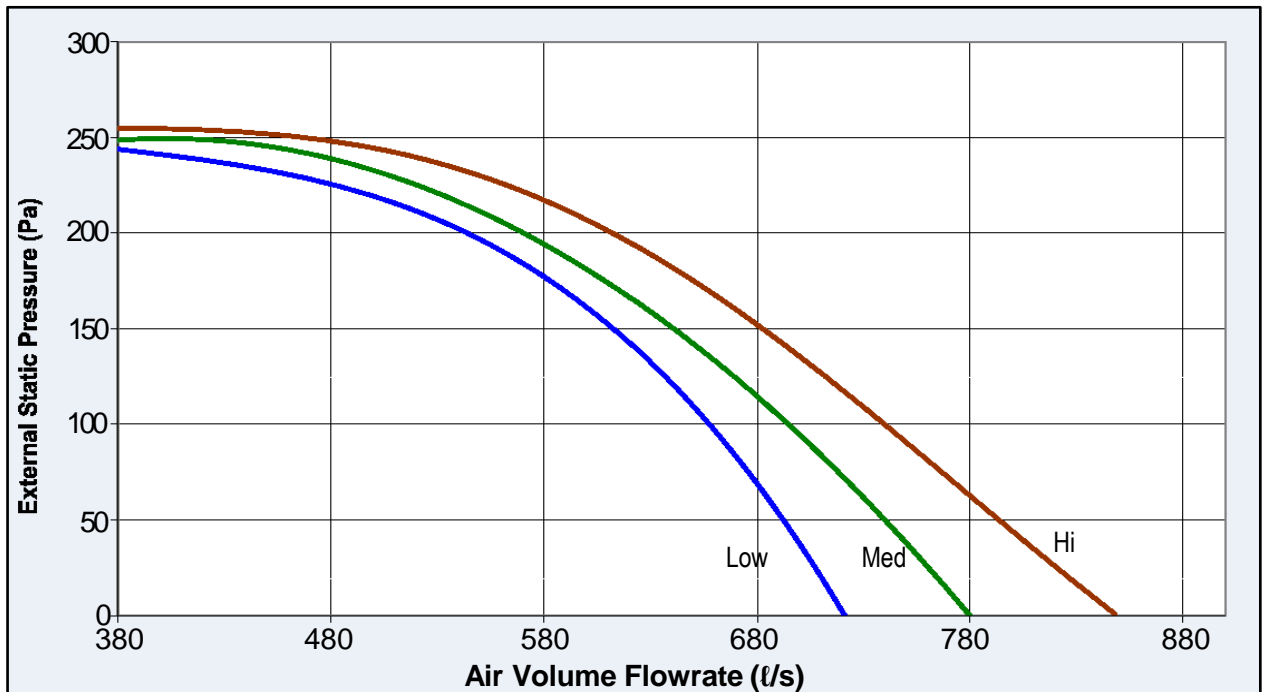


Fan Performance Curves (4 Row)

40LMA060 with AC MOTOR




40LMA080 with AC MOTOR

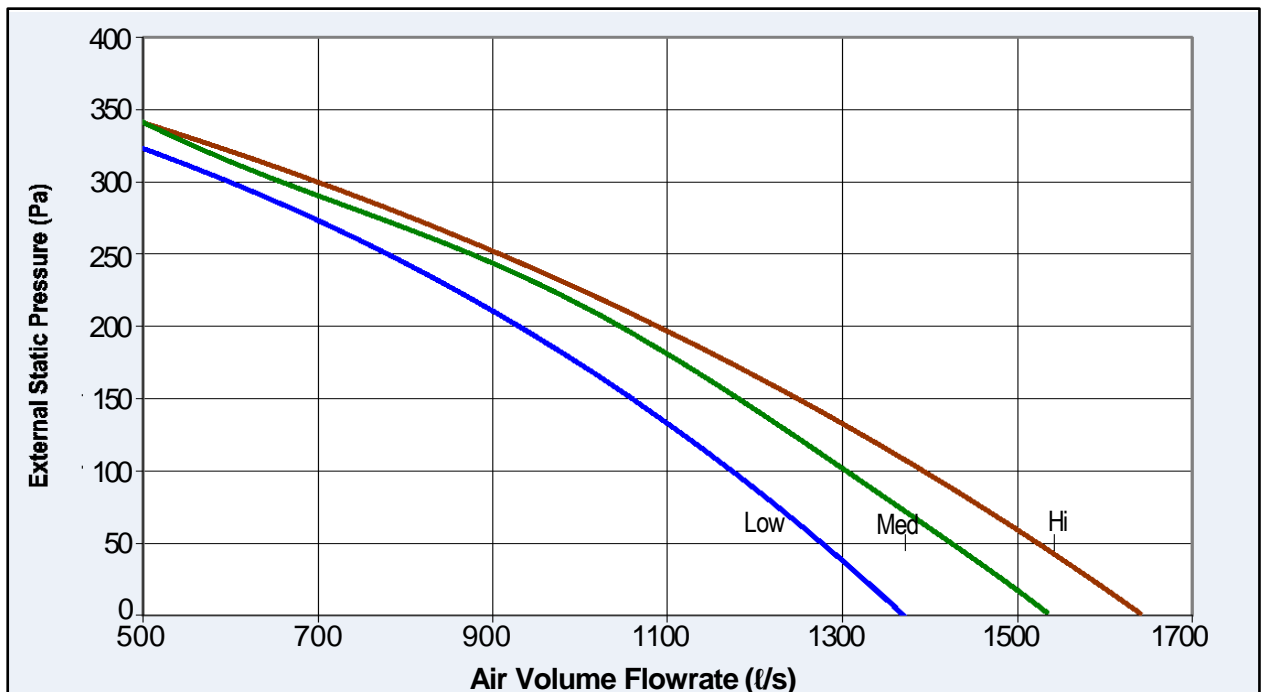


Fan Performance Curves (6 Row)

40LMA024 with AC MOTOR

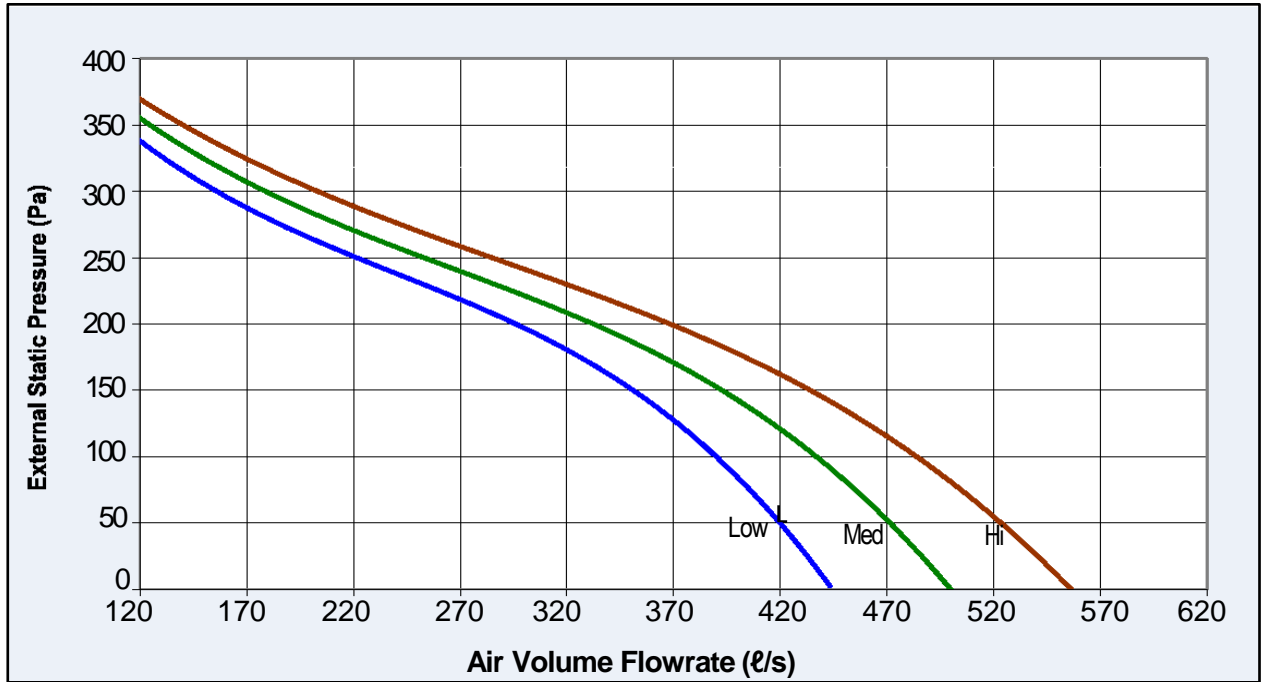


40LMA040 with AC MOTOR

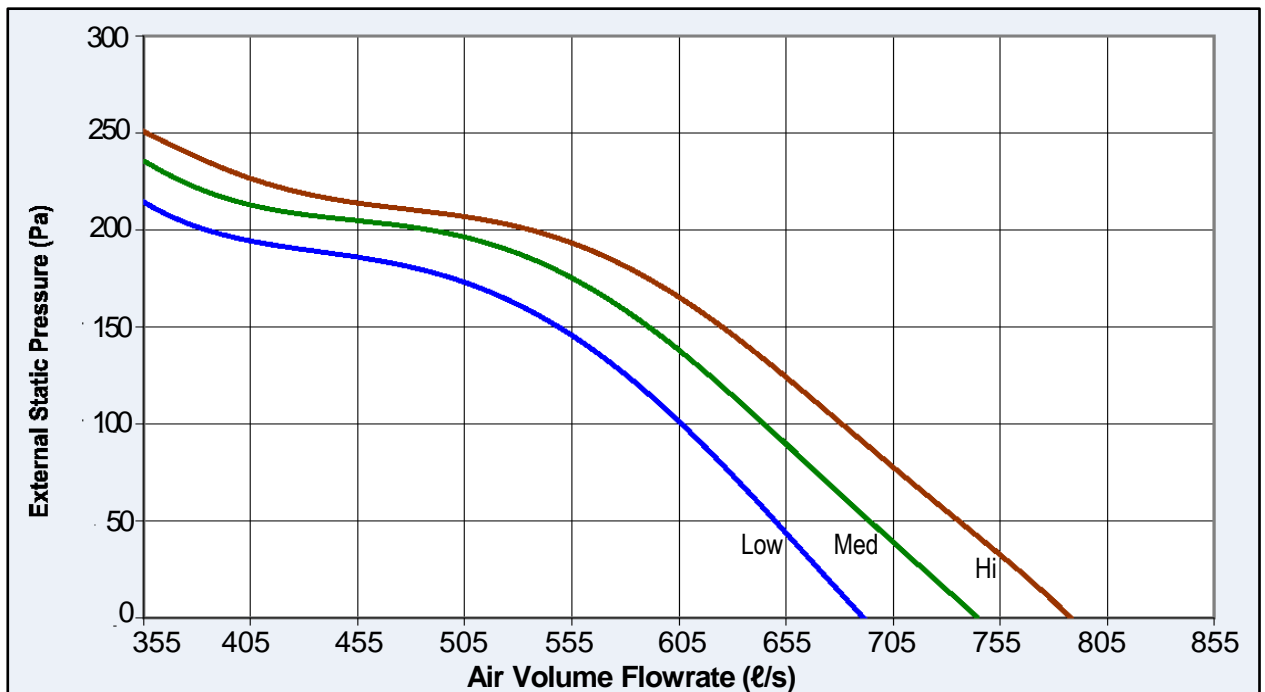


Fan Performance Curves (6 Row)

40LMA060 with AC MOTOR

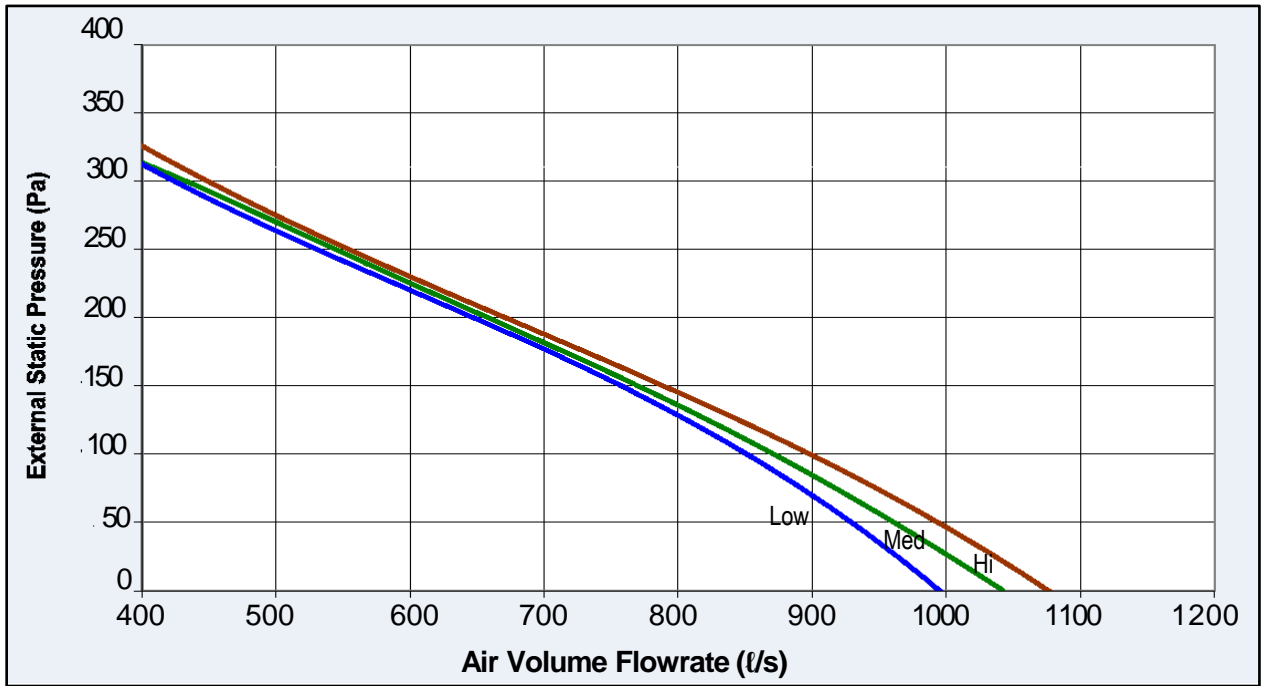


40LMA080 with AC MOTOR

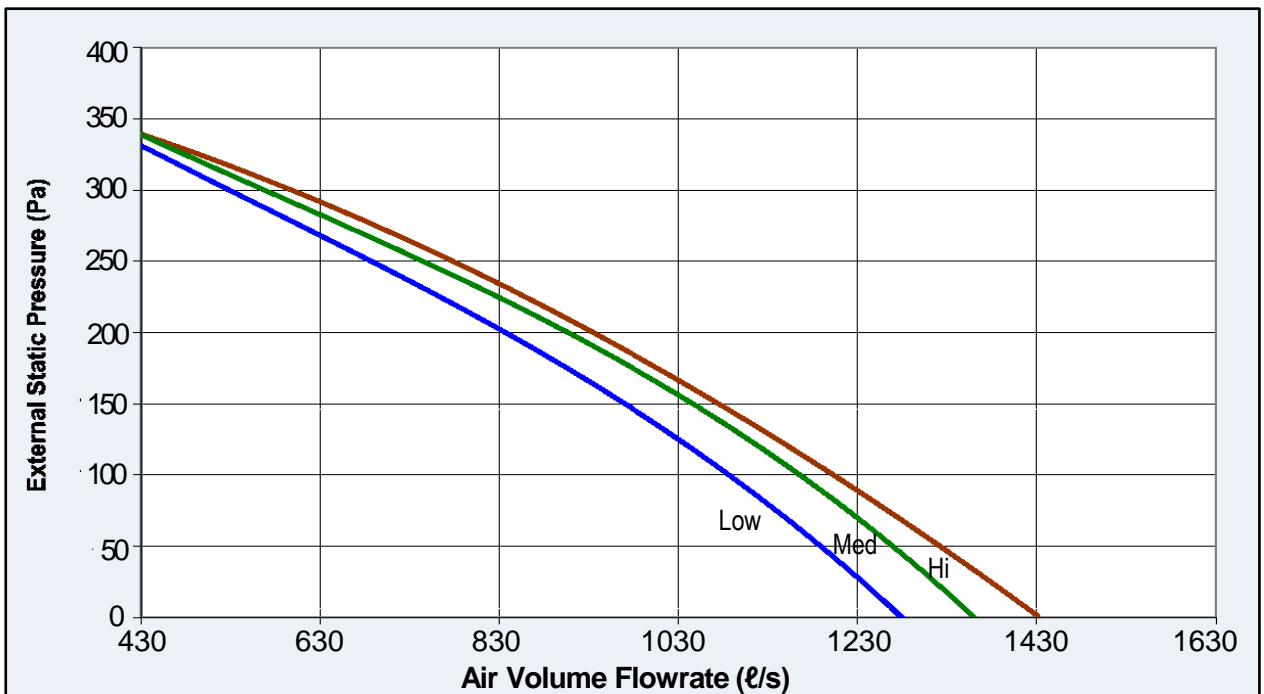


Fan Performance Curves (4 Row)

40LMA024 with EC MOTOR

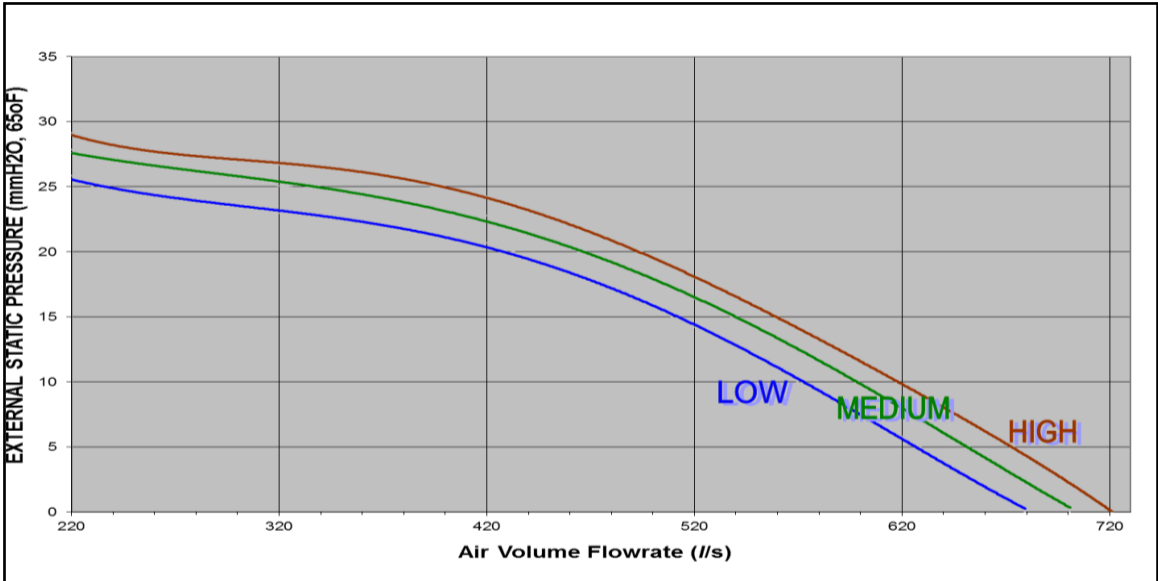


40LMA040 with EC MOTOR

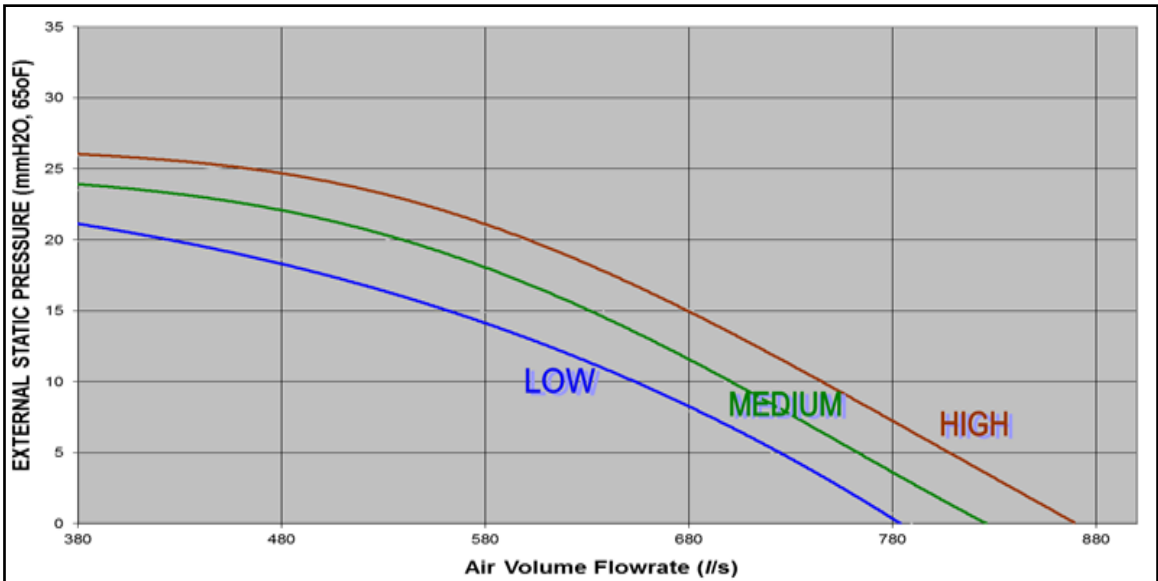


Fan Performance Curves (4 Row)

40LMA060 with EC MOTOR

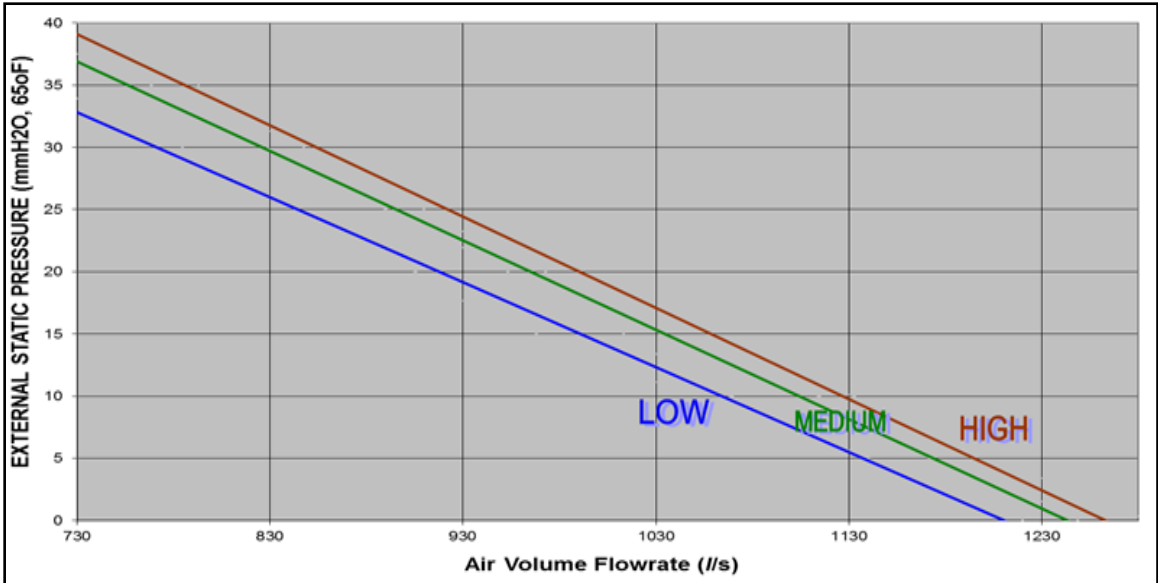


40LMA080 with EC MOTOR

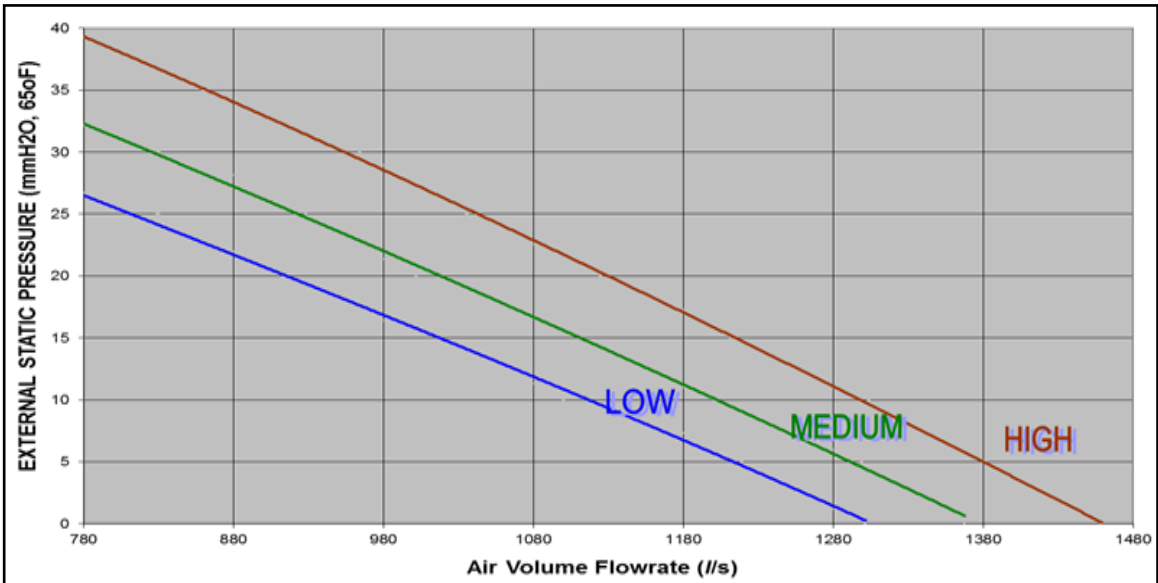


Fan Performance Curves (6 Row)

40LMA024 with EC MOTOR

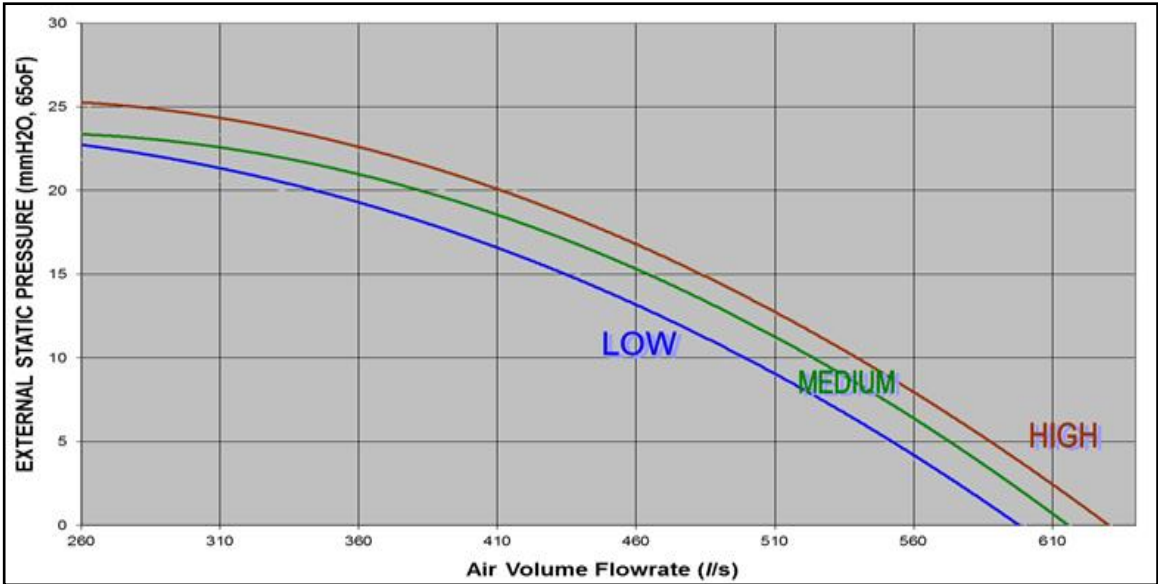


40LMA040 with EC MOTOR

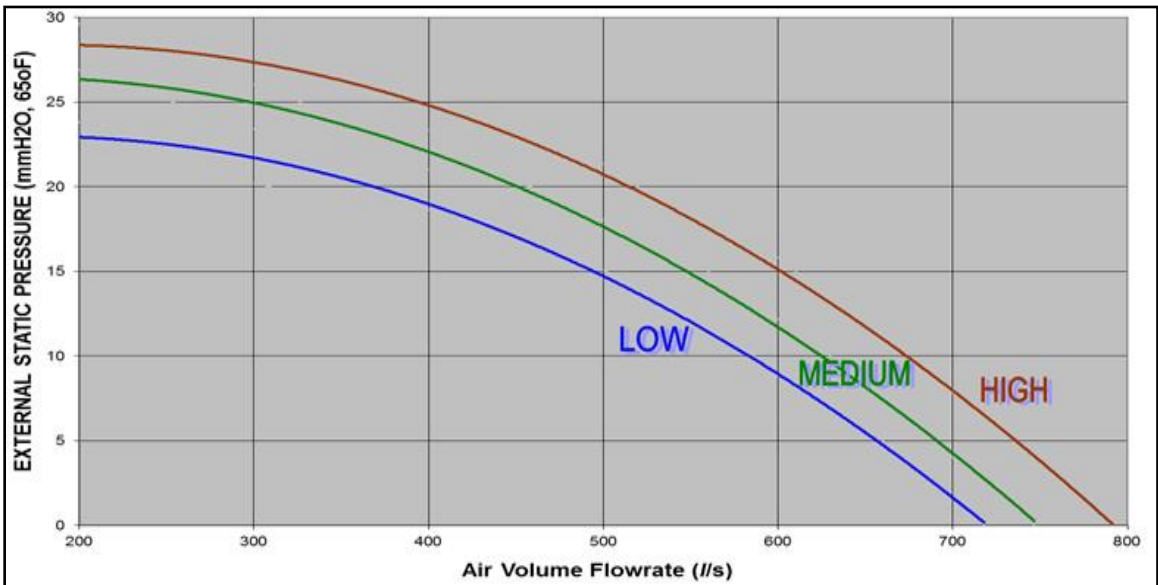


Fan Performance Curves (6 Row)

40LMA060 with EC MOTOR

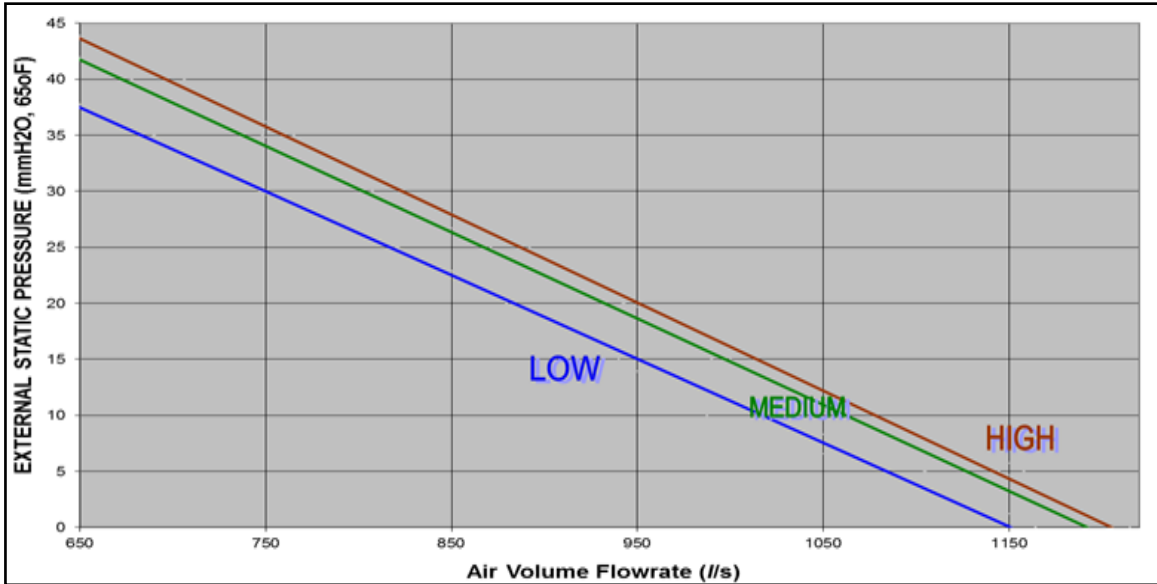


40LMA080 with EC MOTOR

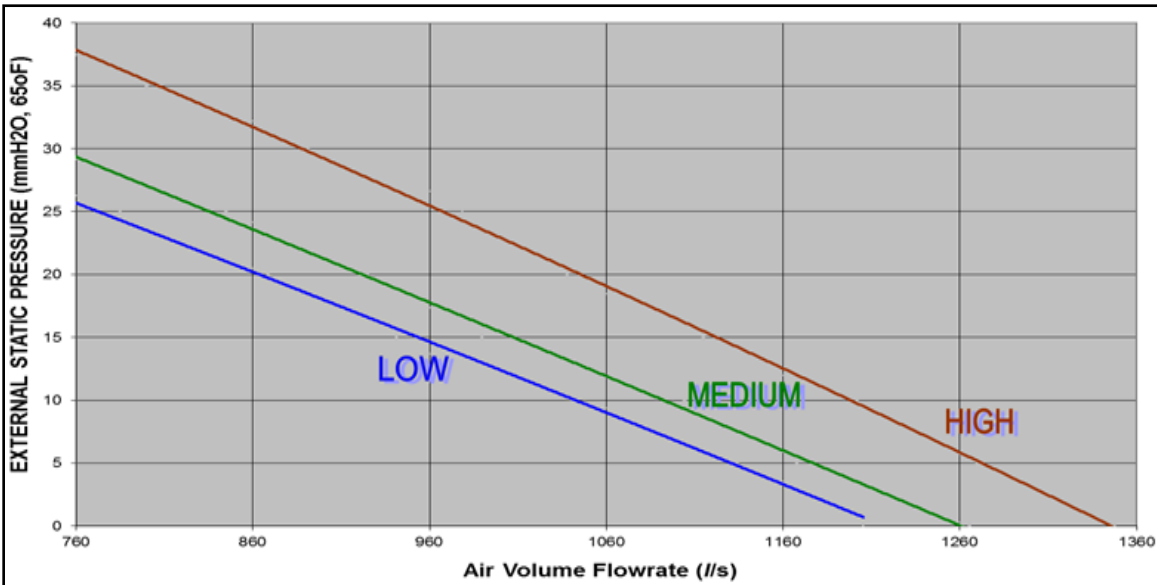


Coil Pressure Drop (4 Row)


40LMA024 with AC & EC MOTOR

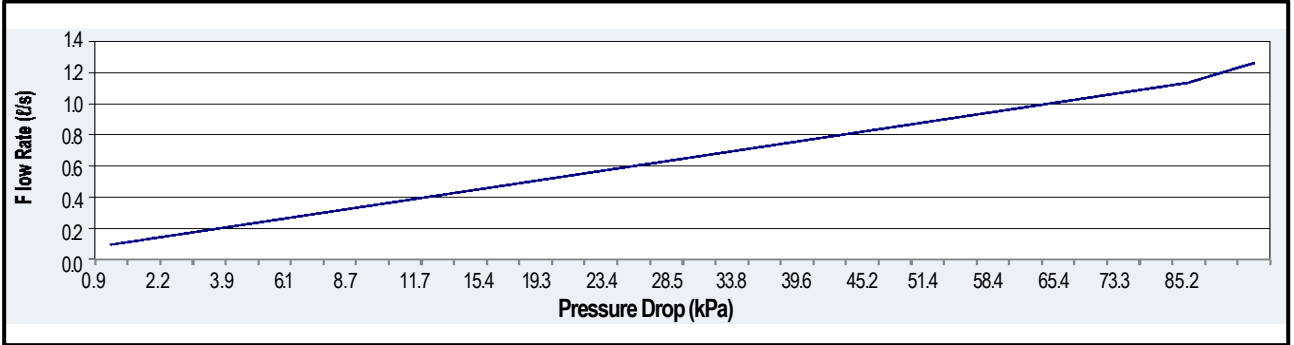


40LMA040 with AC & EC MOTOR

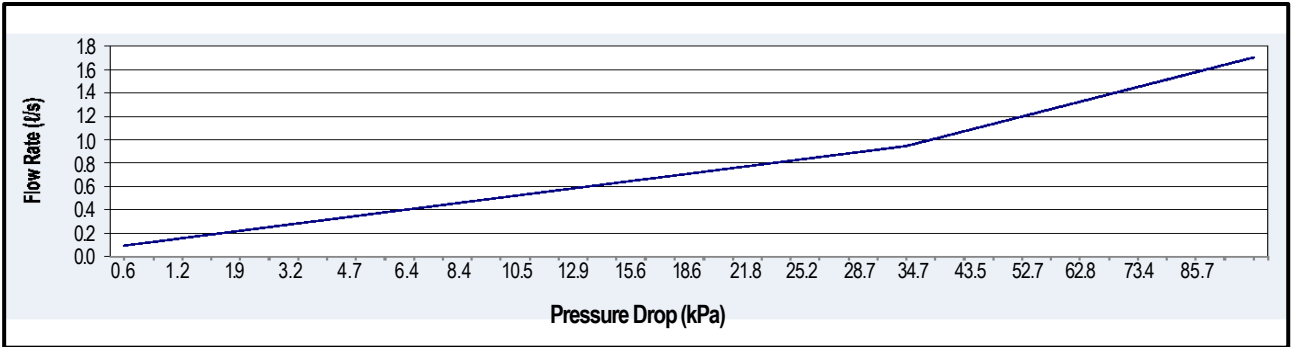

40LMA060 with AC & EC MOTOR

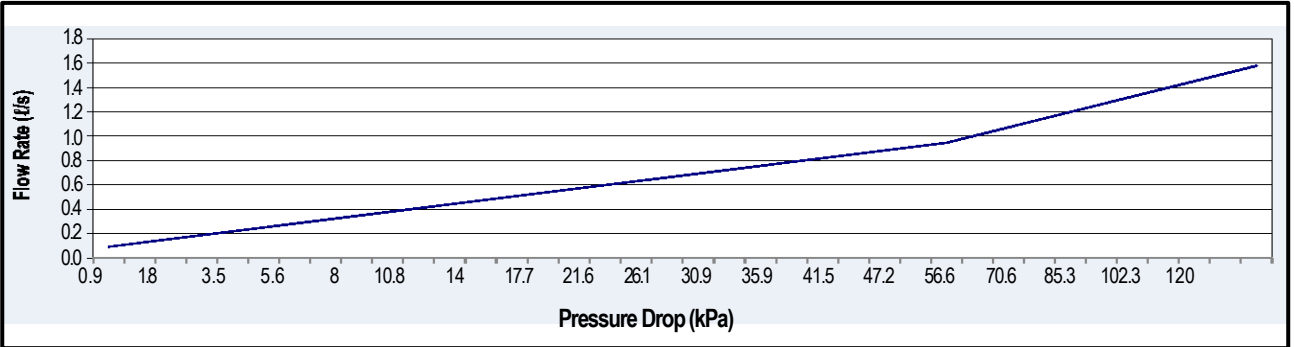


40LMA080 with AC & EC MOTOR

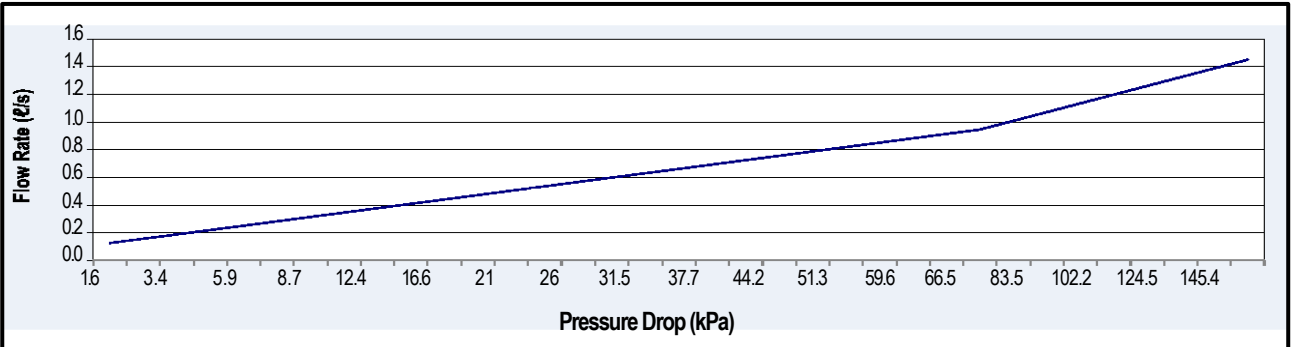


Coil Pressure Drop (6 Row)


40LMA024 with AC & EC MOTOR

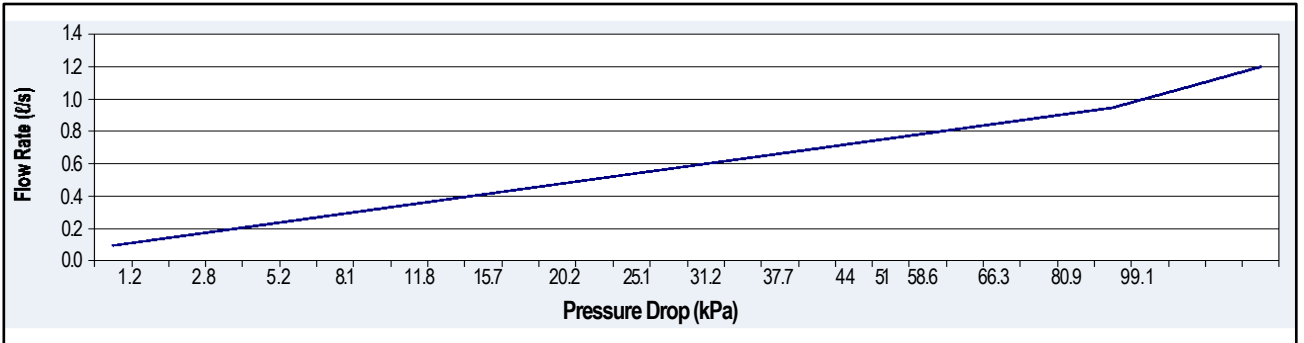


40LMA040 with AC & EC MOTOR

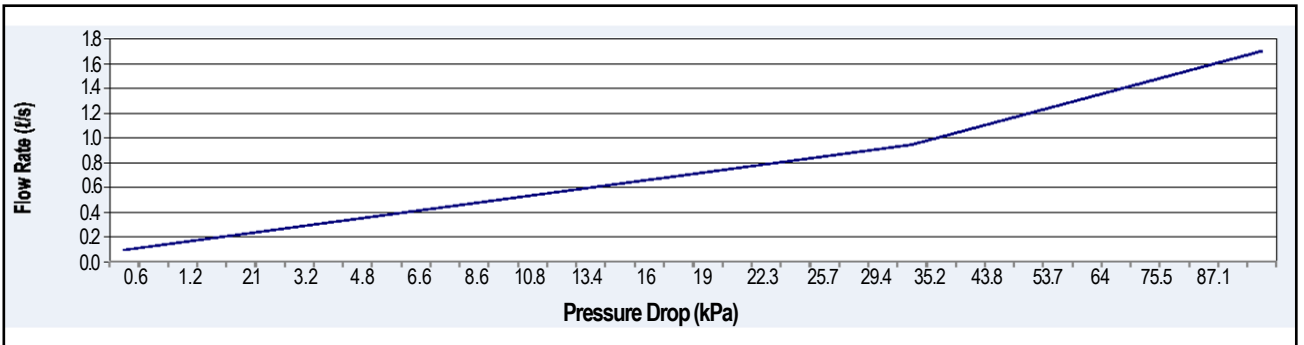

40LMA060 with AC & EC MOTOR

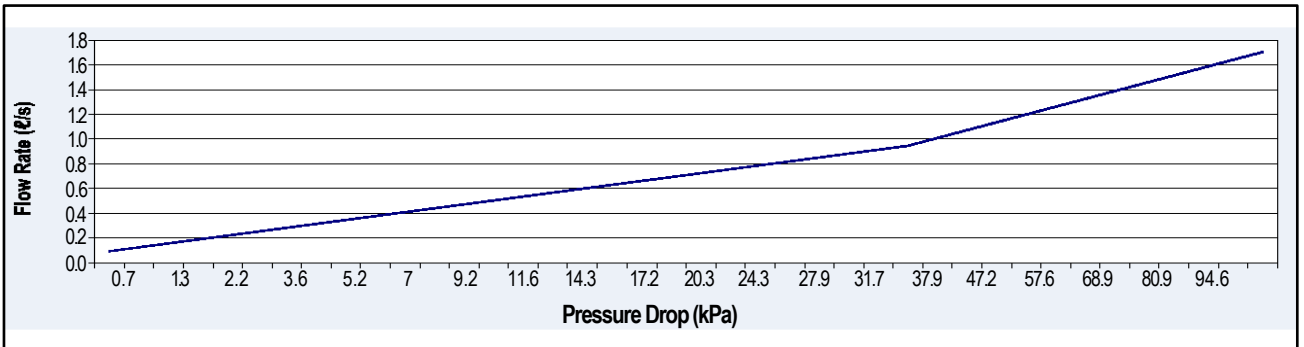

40LMA080 with AC & EC MOTOR

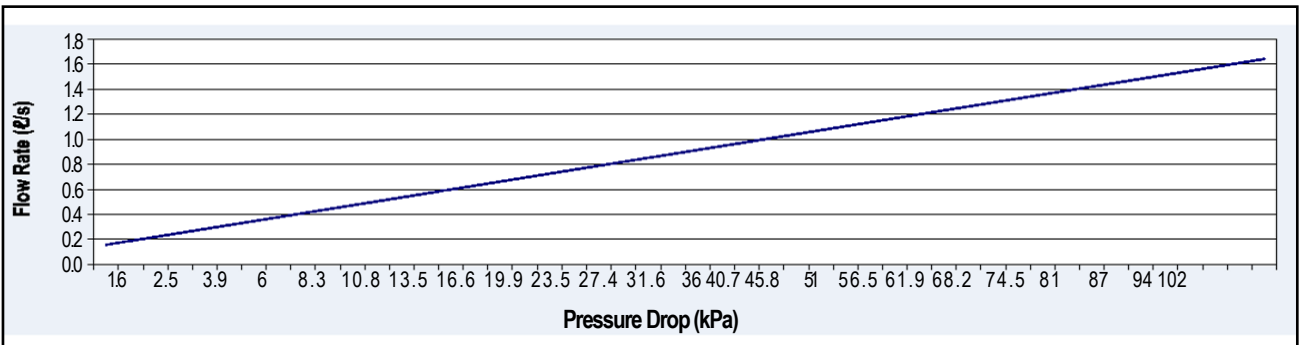

Chilled Water Coils (4 Row)

40LMA024 with AC & EC MOTOR

Entering Water Temp	Air Flow	ℓ/s	400				450				500			
	Entering Air Temperature													
	Dry Bulb	°C	21	23	25	27	21	23	25	27	21	23	25	27
Wet Bulb	°C	16	17	18	19	16	17	18	19	16	17	18	19	
5	Total Capacity	kW	5.29	6.48	7.75	8.81	5.58	6.82	8.17	9.26	5.95	7.28	8.69	9.84
	Sensible Heat Capacity	kW	4.34	5.21	6.30	6.18	4.61	5.53	6.68	6.55	4.95	5.94	7.17	7.02
	Pressure Drop	kPa	3.90	5.40	7.30	10.1	4.31	6.31	8.83	11.0	4.90	7.30	9.92	12.26
	Water Flow	ℓ/s	0.23	0.28	0.33	0.38	0.24	0.29	0.35	0.4	0.26	0.31	0.37	0.42
6	Total Capacity	kW	4.53	5.69	6.96	7.91	4.77	6.00	7.35	8.32	5.10	6.40	7.84	8.84
	Sensible Heat Capacity	kW	3.98	4.84	5.93	5.80	4.22	5.14	6.3	6.15	4.54	5.53	6.77	6.60
	Pressure Drop	kPa	2.90	4.50	6.10	8.26	3.17	4.90	7.30	9.08	3.90	5.66	8.19	10.1
	Water Flow	ℓ/s	0.19	0.24	0.30	0.34	0.21	0.26	0.32	0.36	0.22	0.27	0.34	0.38
7	Total Capacity	kW	3.85	4.96	6.22	7.03	4.07	5.23	6.57	7.39	4.35	5.60	7.03	7.86
	Sensible Heat Capacity	kW	3.62	4.49	5.58	5.43	3.84	4.76	5.93	5.76	4.13	5.12	6.38	6.18
	Pressure Drop	kPa	2.30	3.47	4.99	6.21	2.82	3.80	5.86	7.38	2.90	4.76	6.81	8.18
	Water Flow	ℓ/s	0.17	0.21	0.27	0.30	0.17	0.23	0.28	0.32	0.19	0.24	0.30	0.34
8	Total Capacity	kW	3.27	4.31	5.55	6.17	3.46	4.56	5.86	6.5	3.71	4.88	6.28	6.93
	Sensible Heat Capacity	kW	3.24	4.14	5.23	5.06	3.43	4.39	5.56	5.38	3.68	4.72	5.98	5.78
	Pressure Drop	kPa	2.06	2.88	4.29	4.90	2.06	2.90	4.75	5.74	2.20	3.63	5.45	6.63
	Water Flow	ℓ/s	0.14	0.19	0.24	0.27	0.15	0.20	0.25	0.28	0.16	0.21	0.27	0.30
9	Total Capacity	kW	2.79	3.76	4.95	5.37	2.95	3.98	5.24	5.66	3.16	4.27	5.62	6.05
	Sensible Heat Capacity	kW	2.79	3.74	4.88	4.71	2.95	3.97	5.17	5.00	3.16	4.26	5.56	5.39
	Pressure Drop	kPa	1.50	2.20	3.46	4.02	1.50	2.71	3.81	4.44	1.50	2.71	4.80	5.07
	Water Flow	ℓ/s	0.12	0.16	0.21	0.23	0.13	0.17	0.23	0.24	0.14	0.18	0.24	0.26

40LMA040 with AC & EC MOTOR

Entering Water Temp	Air Flow	ℓ/s	600				700				800			
	Entering Air Temperature													
	Dry Bulb	°C	21	23	25	27	21	23	25	27	21	23	25	27
Wet Bulb	°C	16	17	18	19	16	17	18	19	16	17	18	19	
5	Total Capacity	kW	11.22	13.34	15.46	17.5	9.47	11.65	13.91	15.67	9.91	12.18	14.51	16.33
	Sensible Heat Capacity	kW	7.17	8.61	10.41	10.2	7.94	9.54	11.51	11.25	8.35	10.03	12.1	11.81
	Pressure Drop	kPa	5.29	7.70	11.03	13.92	6.29	9.37	12.83	15.77	6.96	10.6	14.05	17.53
	Water Flow	ℓ/s	0.37	0.46	0.55	0.62	0.41	0.50	0.60	0.67	0.51	0.60	0.70	0.79
6	Total Capacity	kW	9.7	11.79	13.96	15.91	8.15	10.21	12.49	14.06	8.53	10.69	13.07	14.66
	Sensible Heat Capacity	kW	6.56	7.99	9.80	9.57	7.27	8.86	10.86	10.56	7.65	9.33	11.42	11.09
	Pressure Drop	kPa	3.90	6.04	8.84	11.0	4.70	7.30	10.5	12.9	5.21	7.75	11.82	14.2
	Water Flow	ℓ/s	0.32	0.40	0.49	0.55	0.35	0.44	0.54	0.60	0.44	0.53	0.63	0.72
7	Total Capacity	kW	8.25	10.32	12.53	14.37	6.94	8.95	11.25	12.58	7.28	9.37	11.79	13.11
	Sensible Heat Capacity	kW	5.96	7.41	9.23	8.97	6.6	8.22	10.24	9.92	6.95	8.65	10.78	10.43
	Pressure Drop	kPa	3.05	4.70	7.30	9.05	2.19	5.50	8.76	10.59	3.90	6.28	9.40	11.8
	Water Flow	ℓ/s	0.27	0.35	0.44	0.50	0.30	0.38	0.48	0.54	0.37	0.47	0.57	0.65
8	Total Capacity	kW	6.94	8.93	11.1	12.74	5.92	7.80	10.02	11.01	6.2	8.19	10.52	11.53
	Sensible Heat Capacity	kW	5.33	6.81	8.64	8.38	5.89	7.55	9.59	9.26	6.19	7.94	10.09	9.75
	Pressure Drop	kPa	2.22	3.84	5.78	7.11	1.60	2.77	7.05	8.40	2.85	4.70	7.51	9.00
	Water Flow	ℓ/s	0.23	0.30	0.39	0.43	0.25	0.34	0.43	0.47	0.31	0.40	0.50	0.58
9	Total Capacity	kW	5.84	7.68	9.80	11.14	5.05	6.81	9.01	9.68	5.30	7.16	9.46	10.14
	Sensible Heat Capacity	kW	4.57	6.17	8.04	7.79	5.05	6.81	8.91	8.64	5.30	7.16	9.37	9.09
	Pressure Drop	kPa	1.62	2.92	4.72	5.50	1.17	2.12	5.71	6.58	2.08	3.78	6.40	7.30
	Water Flow	ℓ/s	0.20	0.27	0.35	0.38	0.22	0.29	0.39	0.42	0.27	0.35	0.44	0.51

Chilled Water Coils (4 Row)

40LMA060 with AC & EC MOTOR

Entering Water Temp	Air Flow	ℓ/s	800				900				1000			
	Entering Air Temperature													
	Dry Bulb	°C	21	23	25	27	21	23	25	27	21	23	25	27
Wet Bulb	°C	16	17	18	19	16	17	18	19	16	17	18	19	
5	Total Capacity	kW	14.05	16.68	19.5	22.03	14.10	16.74	19.57	22.1	14.4	17.11	20.01	22.59
	Sensible Heat Capacity	kW	11.20	13.20	15.73	15.42	11.24	13.24	15.79	15.48	11.53	13.59	16.21	15.87
	Pressure Drop	kPa	22.62	30.73	40.48	50.4	22.62	30.73	40.37	50.4	23.66	31.85	41.92	52.84
	Water Flow	ℓ/s	0.60	0.72	0.84	0.95	0.61	0.72	0.84	0.95	0.62	0.73	0.86	0.97
6	Total Capacity	kW	12.22	14.8	17.63	19.87	12.25	14.85	17.69	19.93	12.53	15.18	18.09	20.37
	Sensible Heat Capacity	kW	10.33	12.33	14.87	14.5	10.37	12.38	14.93	14.56	10.64	12.7	15.33	14.93
	Pressure Drop	kPa	17.6	23.8	33.6	41.5	15.69	23.8	33.6	41.5	17.7	25.75	34.86	43.77
	Water Flow	ℓ/s	0.52	0.64	0.76	0.85	0.53	0.64	0.76	0.86	0.54	0.65	0.78	0.88
7	Total Capacity	kW	10.56	13.06	15.88	17.81	10.6	13.11	15.93	17.87	10.84	13.41	16.3	18.26
	Sensible Heat Capacity	kW	9.49	11.49	14.04	13.63	9.53	11.53	14.09	13.68	9.78	11.83	14.46	14.03
	Pressure Drop	kPa	12.38	19.64	27.79	34.04	12.11	19.5	26.71	33.94	13.78	20.58	28.86	35.9
	Water Flow	ℓ/s	0.45	0.56	0.68	0.77	0.46	0.56	0.68	0.77	0.47	0.58	0.7	0.79
8	Total Capacity	kW	9.06	11.46	14.24	15.8	9.09	11.5	14.29	15.84	9.31	11.77	14.63	16.19
	Sensible Heat Capacity	kW	8.64	10.66	13.21	12.77	8.67	10.7	13.26	12.82	8.90	10.98	13.61	13.15
	Pressure Drop	kPa	9.31	15.52	22.67	26.26	9.21	13.85	22.67	26.26	10.52	15.7	23.8	28.3
	Water Flow	ℓ/s	0.39	0.49	0.61	0.68	0.39	0.49	0.61	0.68	0.40	0.51	0.63	0.70
9	Total Capacity	kW	7.73	10.05	12.79	13.91	7.76	10.09	12.83	13.96	7.95	10.33	13.14	14.28
	Sensible Heat Capacity	kW	7.70	9.81	12.37	11.94	7.72	9.84	12.42	11.98	7.92	10.1	12.75	12.3
	Pressure Drop	kPa	6.99	11.2	18.66	21.6	6.93	10.95	16.65	21.6	7.96	12.5	19.7	22.64
	Water Flow	ℓ/s	0.33	0.43	0.55	0.60	0.33	0.43	0.55	0.60	0.34	0.44	0.57	0.61

40LMA080 with AC & EC MOTOR

Entering Water Temp	Air Flow	ℓ/s	1100				1250				1400			
	Entering Air Temperature													
	Dry Bulb	°C	21	23	25	27	21	23	25	27	21	23	25	27
Wet Bulb	°C	16	17	18	19	16	17	18	19	16	17	18	19	
5	Total Capacity	kW	18.29	21.48	24.85	28.26	18.92	22.22	25.72	29.23	19.89	23.38	27.09	30.75
	Sensible Heat Capacity	kW	13.95	16.32	19.31	19.08	14.5	16.96	20.09	19.82	15.36	17.98	21.31	20.99
	Pressure Drop	kPa	47.5	63.2	83.5	102.2	50.47	66.5	89.07	112.5	56.17	75.1	98.11	112.5
	Water Flow	ℓ/s	0.79	0.92	1.07	1.21	0.81	0.95	1.10	1.25	0.85	1.00	1.16	1.32
6	Total Capacity	kW	15.95	19.15	22.53	25.61	16.49	19.8	23.31	26.47	17.35	20.82	24.54	27.83
	Sensible Heat Capacity	kW	12.87	15.26	18.27	17.95	13.38	15.86	19	18.65	14.18	16.82	20.16	19.76
	Pressure Drop	kPa	36.47	51.3	68.23	85.33	39.86	54.7	71.83	93.0	43.43	59.6	81.94	102.2
	Water Flow	ℓ/s	0.69	0.82	0.97	1.10	0.71	0.85	1.00	1.14	0.75	0.89	1.05	1.2
7	Total Capacity	kW	13.78	16.84	20.22	22.94	14.26	17.42	20.93	23.71	15.01	18.34	22.04	24.91
	Sensible Heat Capacity	kW	11.83	14.2	17.21	16.82	12.3	14.77	17.91	17.48	13.05	15.66	19.0	18.52
	Pressure Drop	kPa	27.79	40.9	56.06	69.88	30.72	43.11	59.06	75.1	33.53	47.5	66.5	83.5
	Water Flow	ℓ/s	0.59	0.72	0.87	0.99	0.61	0.75	0.9	1.02	0.65	0.79	0.95	1.07
8	Total Capacity	kW	11.78	14.78	18.14	20.42	12.19	15.3	18.79	21.12	12.85	16.12	19.82	22.21
	Sensible Heat Capacity	kW	10.84	13.2	16.21	15.75	11.27	13.74	16.87	16.38	11.95	14.58	17.92	17.38
	Pressure Drop	kPa	21.0	31.5	46.28	59.6	21.89	34.5	48.89	59.53	24.75	37.7	54.7	66.86
	Water Flow	ℓ/s	0.51	0.64	0.78	0.88	0.52	0.66	0.81	0.91	0.55	0.69	0.85	0.96
9	Total Capacity	kW	10.07	12.86	16.15	17.96	10.44	13.33	16.75	18.57	11.01	14.08	17.68	19.52
	Sensible Heat Capacity	kW	9.82	12.2	15.22	14.71	10.2	12.69	15.84	15.31	10.81	13.46	16.82	16.23
	Pressure Drop	kPa	15.9	24.31	37.7	45.09	16.6	26.0	40.9	47.5	18.8	29.7	44.2	52.2
	Water Flow	ℓ/s	0.43	0.55	0.69	0.77	0.45	0.57	0.72	0.80	0.47	0.61	0.76	0.84

Chilled Water Coils (6 Row)

40LMA024 with AC & EC MOTOR														
Entering Water Temp	Air Flow	ℓ/s	400				450				500			
	Entering Air Temperature													
	Dry Bulb	°C	21	23	25	27	21	23	25	27	21	23	25	27
	Wet Bulb	°C	16	17	18	19	16	17	18	19	16	17	18	19
5	Total Capacity	kW	7.73	9.12	10.51	11.89	8.42	9.91	11.45	12.95	8.93	10.51	12.15	13.74
	Sensible Heat Capacity	kW	5.61	5.67	7.75	7.70	6.16	7.21	8.52	8.44	6.58	7.70	9.10	9.01
	Pressure Drop	kPa	10.34	15.22	17.6	22.9	12.79	16.41	21.99	26.16	14.5	19.23	24.22	29.9
	Water Flow	ℓ/s	0.33	0.39	0.45	0.51	0.36	0.43	0.49	0.56	0.38	0.45	0.52	0.59
6	Total Capacity	kW	6.69	8.10	9.52	10.82	7.30	8.81	10.36	11.77	7.76	9.34	11.00	12.49
	Sensible Heat Capacity	kW	5.13	6.11	7.30	7.22	5.65	6.71	8.02	7.92	6.05	7.18	8.58	8.46
	Pressure Drop	kPa	7.80	11.18	16.3	19.27	9.85	13.7	17.6	22.9	11.06	15.54	20.2	25.1
	Water Flow	ℓ/s	0.29	0.35	0.41	0.46	0.31	0.38	0.45	0.51	0.33	0.40	0.47	0.54
7	Total Capacity	kW	5.70	7.10	8.56	9.77	6.22	7.75	9.32	10.62	6.62	8.23	9.89	11.25
	Sensible Heat Capacity	kW	4.69	5.66	6.87	6.76	5.16	6.24	7.56	7.42	5.53	6.68	8.09	7.93
	Pressure Drop	kPa	5.70	8.78	12.15	16.92	7.61	11.09	14.52	18.99	8.10	12.06	17.06	20.86
	Water Flow	ℓ/s	0.25	0.31	0.37	0.42	0.27	0.33	0.40	0.46	0.28	0.35	0.43	0.48
8	Total Capacity	kW	4.81	6.14	7.61	8.69	5.25	6.71	8.3	9.43	5.60	7.15	8.82	10.00
	Sensible Heat Capacity	kW	4.28	5.24	6.45	6.31	4.71	5.78	7.11	6.93	5.05	6.19	7.61	7.40
	Pressure Drop	kPa	4.07	6.60	9.90	13.7	5.20	8.10	12.21	14.72	5.82	9.43	13.87	17.23
	Water Flow	ℓ/s	0.21	0.26	0.33	0.37	0.23	0.29	0.36	0.41	0.24	0.31	0.38	0.43
9	Total Capacity	kW	4.04	5.28	6.73	7.63	4.42	5.79	7.36	8.30	4.72	6.17	7.84	8.80
	Sensible Heat Capacity	kW	3.88	4.84	6.06	5.87	4.27	5.34	6.68	6.46	4.57	5.73	7.16	6.91
	Pressure Drop	kPa	2.89	4.91	7.90	9.82	3.90	6.60	9.90	12.11	4.16	7.06	10.94	13.7
	Water Flow	ℓ/s	0.17	0.23	0.29	0.33	0.19	0.25	0.32	0.36	0.20	0.27	0.34	0.38

40LMA040 with AC & EC MOTOR														
Entering Water Temp	Air Flow	ℓ/s	600				700				800			
	Entering Air Temperature													
	Dry Bulb	°C	21	23	25	27	21	23	25	27	21	23	25	27
	Wet Bulb	°C	16	17	18	19	16	17	18	19	16	17	18	19
5	Total Capacity	kW	11.2	13.2	15.73	15.42	11.82	14.05	16.27	18.41	11.97	14.22	16.47	18.63
	Sensible Heat Capacity	kW	14.05	16.68	19.5	22.03	8.64	10.18	12.04	11.95	8.76	10.32	12.2	12.1
	Pressure Drop	kPa	22.62	30.73	40.48	50.4	10.84	14.6	17.7	22.3	9.78	13.77	18.25	22.6
	Water Flow	ℓ/s	0.60	0.72	0.84	0.95	0.51	0.60	0.70	0.79	0.51	0.61	0.71	0.80
6	Total Capacity	kW	10.33	12.33	14.87	14.5	10.22	12.42	14.7	16.73	10.35	12.58	14.89	16.93
	Sensible Heat Capacity	kW	12.22	14.8	17.63	19.87	7.92	9.44	11.33	11.2	8.03	9.57	11.48	11.35
	Pressure Drop	kPa	17.6	23.8	33.6	41.5	7.50	12.00	14.6	18.75	7.50	10.8	14.51	19.0
	Water Flow	ℓ/s	0.52	0.64	0.76	0.85	0.44	0.53	0.63	0.72	0.44	0.54	0.64	0.73
7	Total Capacity	kW	9.49	11.49	14.04	13.63	8.69	10.88	13.21	15.1	8.80	11.01	13.38	15.28
	Sensible Heat Capacity	kW	10.56	13.06	15.88	17.81	7.23	8.76	10.66	10.49	7.33	8.88	10.81	10.63
	Pressure Drop	kPa	12.38	19.64	27.79	34.04	6.24	9.62	12.23	15.3	5.70	8.60	12.2	15.77
	Water Flow	ℓ/s	0.45	0.56	0.68	0.77	0.37	0.47	0.57	0.65	0.38	0.47	0.57	0.66
8	Total Capacity	kW	8.64	10.66	13.21	12.77	7.32	9.41	11.72	13.4	7.42	9.53	11.86	13.52
	Sensible Heat Capacity	kW	9.06	11.46	14.24	15.8	6.59	8.10	10.00	9.78	6.68	8.22	10.14	9.90
	Pressure Drop	kPa	9.31	15.52	22.67	26.26	4.80	7.34	9.70	13.81	4.00	6.60	9.70	12.1
	Water Flow	ℓ/s	0.39	0.49	0.61	0.68	0.31	0.40	0.50	0.58	0.32	0.41	0.51	0.58
9	Total Capacity	kW	7.70	9.81	12.37	11.94	6.17	8.10	10.33	11.74	6.25	8.21	10.47	11.88
	Sensible Heat Capacity	kW	7.73	10.05	12.79	13.91	5.98	7.49	9.38	9.10	6.06	7.60	9.52	9.22
	Pressure Drop	kPa	6.99	11.2	18.66	21.6	4.00	5.33	8.30	9.82	2.85	4.97	7.78	9.66
	Water Flow	ℓ/s	0.33	0.43	0.55	0.60	0.27	0.35	0.44	0.51	0.27	0.35	0.45	0.51

Chilled Water Coils (6 Row)

40LMA060 with AC & EC MOTOR

Entering Water Temp	Air Flow	ℓ/s	800				900				1000			
	Entering Air Temperature													
	Dry Bulb	°C	21	23	25	27	21	23	25	27	21	23	25	27
Wet Bulb	°C	16	17	18	19	16	17	18	19	16	17	18	19	
5	Total Capacity	kW	15.43	18.11	20.88	23.61	16.18	19.0	21.93	24.8	16.96	19.95	23.04	26.05
	Sensible Heat Capacity	kW	11.24	13.13	15.48	15.36	11.85	13.86	16.35	16.20	12.51	14.63	17.28	17.1
	Pressure Drop	kPa	17.2	24.01	30.76	37.9	18.9	26.1	33.7	41.74	20.3	27.9	36.76	45.52
	Water Flow	ℓ/s	0.66	0.78	0.90	1.01	0.69	0.82	0.94	1.06	0.73	0.86	0.99	1.12
6	Total Capacity	kW	13.42	16.09	18.88	21.47	14.1	16.89	19.84	22.54	14.8	17.74	20.86	23.67
	Sensible Heat Capacity	kW	10.32	12.22	14.58	14.4	10.9	12.9	15.4	15.2	11.52	13.63	16.29	16.05
	Pressure Drop	kPa	12.77	18.9	25.63	32.02	14.3	20.3	27.9	35.06	15.9	22.4	30.67	38.22
	Water Flow	ℓ/s	0.58	0.69	0.81	0.92	0.61	0.73	0.85	0.97	0.64	0.76	0.90	1.02
7	Total Capacity	kW	11.44	14.2	17.02	19.39	12.04	14.9	17.87	20.34	12.68	15.64	18.78	21.35
	Sensible Heat Capacity	kW	9.43	11.37	13.74	13.5	9.97	12.01	14.53	14.25	10.56	12.7	15.37	15.05
	Pressure Drop	kPa	9.79	14.67	20.3	26.62	11.3	15.9	22.4	29.11	11.95	17.37	24.56	31.7
	Water Flow	ℓ/s	0.49	0.61	0.73	0.83	0.52	0.64	0.77	0.87	0.54	0.67	0.81	0.92
8	Total Capacity	kW	9.66	12.33	15.16	17.24	10.17	12.98	15.93	18.04	10.72	13.66	16.76	18.94
	Sensible Heat Capacity	kW	8.61	10.54	12.92	12.6	9.11	11.15	13.67	13.29	9.64	11.8	14.46	14.05
	Pressure Drop	kPa	7.00	11.37	16.32	21.54	8.10	13.13	17.73	23.3	8.58	13.39	19.45	25.84
	Water Flow	ℓ/s	0.42	0.53	0.65	0.74	0.44	0.56	0.69	0.78	0.46	0.59	0.72	0.81
9	Total Capacity	kW	8.14	10.63	13.46	15.19	8.58	11.2	14.13	15.93	9.06	11.81	14.89	16.72
	Sensible Heat Capacity	kW	7.82	9.74	12.16	11.75	8.27	10.31	12.85	12.42	8.75	10.92	13.61	13.13
	Pressure Drop	kPa	5.20	8.47	13.19	16.23	5.79	9.81	14.31	17.58	6.06	10.4	15.72	19.21
	Water Flow	ℓ/s	0.35	0.46	0.58	0.65	0.37	0.48	0.61	0.69	0.39	0.51	0.64	0.72

40LMA080 with AC & EC MOTOR

Entering Water Temp	Air Flow	ℓ/s	1100				1250				1400			
	Entering Air Temperature													
	Dry Bulb	°C	21	23	25	27	21	23	25	27	21	23	25	27
Wet Bulb	°C	16	17	18	19	16	17	18	19	16	17	18	19	
5	Total Capacity	kW	20.45	23.81	27.27	30.83	21.34	24.88	28.51	32.23	21.71	25.31	29.02	32.8
	Sensible Heat Capacity	kW	14.56	16.92	19.85	19.75	15.26	17.75	20.84	20.72	15.56	18.1	21.25	21.12
	Pressure Drop	kPa	33.8	44.6	56.5	70.6	36.0	48.4	62.2	77.5	37.74	50.78	64.83	85.25
	Water Flow	ℓ/s	0.88	1.02	1.17	1.32	0.92	1.07	1.22	1.38	0.93	1.09	1.25	1.41
6	Total Capacity	kW	17.86	21.28	24.78	28.16	18.65	22.21	25.89	29.42	18.97	22.6	26.35	29.93
	Sensible Heat Capacity	kW	13.37	15.76	18.71	18.55	14.02	16.54	19.65	19.46	14.3	16.86	20.03	19.84
	Pressure Drop	kPa	26.61	36.0	47.44	59.81	28.5	38.4	51.52	65.2	29.4	40.16	53.6	71.72
	Water Flow	ℓ/s	0.77	0.91	1.06	1.21	0.80	0.95	1.11	1.26	0.81	0.97	1.13	1.29
7	Total Capacity	kW	15.45	18.77	22.29	25.46	16.12	19.6	23.3	26.59	16.39	19.94	23.72	27.06
	Sensible Heat Capacity	kW	12.27	14.63	17.59	17.36	12.88	15.37	18.48	18.22	13.13	15.67	18.85	18.58
	Pressure Drop	kPa	19.9	28.79	38.4	49.35	21.9	30.85	41.46	53.6	21.9	31.6	43.4	56.5
	Water Flow	ℓ/s	0.66	0.81	0.96	1.09	0.69	0.84	1.00	1.14	0.70	0.86	1.02	1.16
8	Total Capacity	kW	13.14	16.34	19.89	22.76	13.73	17.07	20.79	23.76	13.97	17.37	21.15	24.17
	Sensible Heat Capacity	kW	11.22	13.56	16.54	16.22	11.79	14.24	17.38	17.02	12.02	14.53	17.73	17.36
	Pressure Drop	kPa	15.0	21.9	31.6	40.7	16.11	24.1	33.8	43.4	16.6	24.86	34.78	45.8
	Water Flow	ℓ/s	0.57	0.70	0.86	0.98	0.59	0.73	0.89	1.02	0.60	0.75	0.91	1.04
9	Total Capacity	kW	11.04	14.16	17.64	20.05	11.57	14.8	18.45	20.93	11.78	15.06	18.78	21.3
	Sensible Heat Capacity	kW	10.22	12.58	15.54	15.09	10.74	13.22	16.33	15.85	10.96	13.48	16.66	16.16
	Pressure Drop	kPa	10.8	16.6	25.5	31.69	11.89	18.2	27.4	33.94	12.1	18.76	28.3	36.0
	Water Flow	ℓ/s	0.48	0.61	0.76	0.86	0.50	0.64	0.79	0.90	0.51	0.65	0.81	0.92

Hot Water Coils (1 Row, 2 Circuits)

40LMA024 with AC & EC MOTOR

Air Flow	Face Velocity	Water Temp. °C	Water Temp. °C	50		60		70		80	
			Air Temp. (D/B) °C	19	21	19	21	19	21	19	21
400 ℓ/s	2.04 m/s	10	Heating kW	3.50	3.14	5.44	5.08	7.40	7.04	9.38	9.01
			Pressure Drop kPa	0.62	0.51	1.30	1.15	2.17	1.98	3.21	2.99
			Water Flow ℓ/s	0.08	0.08	0.13	0.12	0.18	0.17	0.23	0.22
		15	Heating kW	2.27	1.88	4.36	4.00	6.33	5.97	8.31	7.96
			Pressure Drop kPa	0.13	0.09	0.44	0.38	0.81	0.73	1.27	1.18
			Water Flow ℓ/s	0.04	0.03	0.07	0.06	0.10	0.10	0.14	0.13
450 ℓ/s	2.29 m/s	10	Heating kW	3.74	3.36	5.83	5.44	7.94	7.55	10.06	9.67
			Pressure Drop kPa	0.70	0.58	1.46	1.30	2.45	2.24	3.64	3.39
			Water Flow ℓ/s	0.09	0.08	0.14	0.13	0.19	0.18	0.25	0.24
		15	Heating kW	2.44	2.02	4.66	4.28	6.78	6.39	8.91	8.53
			Pressure Drop kPa	0.15	0.11	0.49	0.42	0.91	0.82	1.44	1.33
			Water Flow ℓ/s	0.04	0.03	0.08	0.07	0.11	0.10	0.15	0.14
500 ℓ/s	2.48 m/s	10	Heating kW	3.90	3.50	6.09	5.69	8.30	7.90	10.52	10.12
			Pressure Drop kPa	0.75	0.62	1.58	1.40	2.66	2.43	3.95	3.68
			Water Flow ℓ/s	0.09	0.08	0.15	0.14	0.20	0.19	0.26	0.25
		15	Heating kW	2.56	2.11	4.86	4.47	7.08	6.68	9.32	8.91
			Pressure Drop kPa	0.17	0.12	0.53	0.45	0.99	0.89	1.55	1.44
			Water Flow ℓ/s	0.04	0.03	0.08	0.07	0.12	0.11	0.15	0.15

40LMA040 with AC & EC MOTOR

Air Flow	Face Velocity	Water Temp. °C	Water Temp. °C	50		60		70		80	
			Air Temp. (D/B) °C	19	21	19	21	19	21	19	21
600 ℓ/s	2.13 m/s	10	Heating kW	6.26	5.68	9.41	8.82	12.58	11.99	15.75	15.16
			Pressure Drop kPa	2.48	2.08	4.89	4.36	7.94	7.29	11.55	10.79
			Water Flow ℓ/s	0.15	0.14	0.23	0.21	0.31	0.29	0.39	0.37
		15	Heating kW	4.72	4.12	7.89	7.30	11.07	10.48	14.26	13.68
			Pressure Drop kPa	0.75	0.59	1.77	1.54	3.11	2.82	4.73	4.39
			Water Flow ℓ/s	0.08	0.07	0.13	0.12	0.18	0.17	0.23	0.22
700 ℓ/s	2.42 m/s	10	Heating kW	6.74	6.11	10.14	9.51	13.57	12.93	17.00	16.36
			Pressure Drop kPa	2.82	2.37	5.59	4.98	9.09	8.34	13.24	12.37
			Water Flow ℓ/s	0.16	0.15	0.25	0.23	0.33	0.32	0.42	0.40
		15	Heating kW	5.07	4.43	8.48	7.85	11.93	11.30	15.38	14.75
			Pressure Drop kPa	0.85	0.68	2.01	1.76	3.55	3.22	5.41	5.02
			Water Flow ℓ/s	0.08	0.07	0.14	0.13	0.19	0.18	0.25	0.24
800 ℓ/s	2.59 m/s	10	Heating kW	7.00	6.34	10.54	9.88	14.10	13.44	17.67	17.01
			Pressure Drop kPa	3.01	2.53	5.98	5.33	9.73	8.93	14.18	13.25
			Water Flow ℓ/s	0.17	0.15	0.26	0.24	0.34	0.33	0.43	0.42
		15	Heating kW	5.26	4.59	8.81	8.15	12.39	11.73	15.98	15.32
			Pressure Drop kPa	0.91	0.72	2.15	1.87	3.79	3.44	5.79	5.38
			Water Flow ℓ/s	0.08	0.07	0.14	0.13	0.20	0.19	0.26	0.25

Performance Data

Hot Water Coils (1 Row, 2 Circuits)

40LMA060 with AC & EC MOTOR

Air Flow	Face Velocity	Water °C	Water Temp. °C	50		60		70		80	
			Air Temp. (D/B) °C	19	21	19	21	19	21	19	21
800 ℓ/s	2.86 m/s	10	Heating kW	8.62	7.82	12.89	12.09	17.18	16.38	21.47	20.68
			Pressure Drop kPa	4.85	4.09	9.53	8.5	15.42	14.16	22.4	20.94
			Water Flow ℓ/s	0.21	0.19	0.31	0.29	0.42	0.40	0.53	0.51
		15	Heating kW	6.58	5.79	10.86	10.07	15.18	14.39	19.51	18.72
			Pressure Drop kPa	1.50	1.20	3.47	3.03	6.06	5.51	9.21	8.55
			Water Flow ℓ/s	0.11	0.09	0.18	0.16	0.25	0.23	0.32	0.31
900 ℓ/s	2.87 m/s	10	Heating kW	8.64	7.84	12.91	12.11	17.21	16.41	21.52	20.72
			Pressure Drop kPa	4.86	4.1	9.56	8.53	15.47	14.21	22.48	21.01
			Water Flow ℓ/s	0.21	0.19	0.31	0.29	0.42	0.4	0.53	0.51
		15	Heating kW	6.59	5.8	10.89	10.09	15.21	14.41	19.55	18.75
			Pressure Drop kPa	1.5	1.2	3.48	3.04	6.08	5.53	9.24	8.58
			Water Flow ℓ/s	0.11	0.09	0.18	0.16	0.25	0.23	0.32	0.31
1000 ℓ/s	2.97 m/s	10	Heating kW	8.8	7.98	13.16	12.34	17.54	16.72	21.93	21.12
			Pressure Drop kPa	5.03	4.24	9.88	8.82	16.01	14.7	23.26	21.74
			Water Flow ℓ/s	0.21	0.19	0.32	0.3	0.43	0.41	0.54	0.52
		15	Heating kW	6.71	5.90	11.09	10.28	15.5	14.69	19.92	19.11
			Pressure Drop kPa	1.55	1.24	3.60	3.14	6.29	5.72	9.56	8.87
			Water Flow ℓ/s	0.11	0.1	0.18	0.17	0.25	0.24	0.33	0.31

40LMA080 with AC & EC MOTOR

Air Flow	Face Velocity	Water °C	Water Temp. °C	50		60		70		80	
			Air Temp. (D/B) °C	19	21	19	21	19	21	19	21
1100 ℓ/s	2.83 m/s	10	Heating kW	11.72	10.67	17.28	16.23	22.86	21.81	28.45	27.41
			Pressure Drop kPa	10.52	8.92	20.23	18.10	32.37	29.78	46.72	43.70
			Water Flow ℓ/s	0.28	0.26	0.42	0.39	0.56	0.53	0.70	0.67
		15	Heating kW	9.20	8.15	14.81	13.77	20.44	19.39	26.06	25.02
			Pressure Drop kPa	3.41	2.76	7.57	6.65	12.97	11.81	19.46	18.09
			Water Flow ℓ/s	0.15	0.13	0.24	0.22	0.33	0.32	0.43	0.41
1250 ℓ/s	2.86 m/s	10	Heating kW	11.78	10.73	17.38	16.32	22.99	21.94	28.62	27.57
			Pressure Drop kPa	10.63	9.01	20.44	18.29	32.72	30.09	47.22	44.17
			Water Flow ℓ/s	0.29	0.26	0.42	0.40	0.56	0.54	0.70	0.68
		15	Heating kW	9.26	8.20	14.90	13.85	20.56	19.51	26.22	25.17
			Pressure Drop kPa	3.45	2.79	7.65	6.72	13.10	11.94	19.66	18.29
			Water Flow ℓ/s	0.15	0.13	0.24	0.22	0.33	0.32	0.43	0.41
1400 ℓ/s	2.89 m/s	10	Heating kW	11.85	10.79	17.48	16.42	23.13	22.07	28.78	27.73
			Pressure Drop kPa	10.74	9.10	20.65	18.48	33.06	30.41	47.72	44.63
			Water Flow ℓ/s	0.29	0.26	0.42	0.40	0.56	0.54	0.71	0.68
		15	Heating kW	9.31	8.24	14.98	13.92	20.67	19.62	26.37	25.32
			Pressure Drop kPa	3.48	2.82	7.73	6.79	13.24	12.06	19.87	18.48
			Water Flow ℓ/s	0.15	0.13	0.24	0.23	0.34	0.32	0.43	0.41

Sound Pressure Level

40LMA with AC MOTOR

Coil # of Row	Model	Speed	Octave Band Centre								
			63	125	250	500	1000	2000	4000	8000	dB(A)
4 Row	40LMA024	H	23.20	30.50	40.10	41.30	46.70	42.10	38.40	28.40	49.80
		M	21.70	29.10	36.60	38.10	43.20	39.40	34.10	24.60	46.50
		L	18.50	27.30	34.90	35.40	40.70	34.70	30.10	20.50	43.70
	40LMA040	H	20.80	37.10	46.00	47.00	48.50	43.90	42.40	30.90	53.20
		M	19.50	35.30	45.10	45.70	47.50	41.70	40.20	28.90	51.90
		L	17.40	32.60	44.10	44.70	45.60	40.60	38.60	26.80	50.50
	40LMA060	H	21.90	34.70	45.30	47.60	47.30	44.80	41.40	31.30	52.90
		M	21.60	34.10	44.50	47.00	46.40	43.90	40.50	36.70	52.20
		L	18.30	32.70	43.60	46.00	45.30	42.80	39.30	28.80	51.00
	40LMA080	H	28.10	37.20	43.60	46.00	49.40	46.20	44.20	35.10	53.60
		M	26.60	35.40	41.90	44.90	48.60	44.50	42.30	31.40	52.30
		L	23.20	31.70	41.50	43.70	46.80	42.50	39.80	28.70	50.60
6 Row	40LMA024	H	25.20	31.70	39.50	41.80	45.00	41.90	37.60	27.00	49.00
		M	20.70	29.50	38.40	40.90	42.90	38.50	34.60	23.10	47.00
		L	14.40	27.40	33.80	36.40	40.50	31.20	31.50	20.10	43.30
	40LMA040	H	20.30	37.00	46.70	47.10	47.70	41.40	40.70	28.40	52.70
		M	18.70	34.80	44.20	44.80	46.80	39.90	38.60	25.80	51.00
		L	15.50	31.50	43.00	43.80	44.20	37.20	37.30	23.20	49.20
	40LMA060	H	22.50	32.90	44.70	46.50	45.40	44.40	38.90	28.90	51.70
		M	20.30	31.60	43.20	45.90	44.80	43.00	38.00	28.30	50.70
		L	18.20	27.90	42.00	44.60	43.30	42.70	36.20	26.30	49.50
	40LMA080	H	25.80	35.40	48.60	49.00	49.00	44.60	40.80	32.10	54.40
		M	24.30	34.30	45.80	46.60	47.60	43.80	40.40	29.80	52.60
		L	21.30	32.80	43.90	45.30	45.80	42.70	37.90	28.50	50.90

40LMA with EC MOTOR

Coil # of Row	Model	Speed	Octave Band Centre								
			63	125	250	500	1000	2000	4000	8000	dB(A)
4 Row	40LMA024	H	25.7	36.0	46.3	48.2	50.6	45.4	42.6	33.0	54.5
		M	22.3	35.7	43.6	46.1	49.0	43.9	40.7	32.7	52.7
		L	21.5	32.5	41.7	44.6	48.5	43.0	40.2	31.1	51.7
	40LMA040	H	28.1	37.9	46.1	48.9	50.6	46.4	43.9	33.3	54.9
		M	24.6	35.5	44.8	46.5	49.1	44.1	41.8	31.0	53.0
		L	21.6	32.9	43.7	44.0	47.3	43.3	4.1	29.5	51.4
	40LMA060	H	27.1	36.8	45.2	47.1	50.2	46.2	42.4	32.6	54.1
		M	26.3	36.3	44.9	46.6	49.2	45.8	42.1	32.2	53.4
		L	25.1	35.8	44.2	45.8	48.4	45.4	41.6	31.8	52.7
	40LMA080	H	27.6	37.9	48.0	44.1	48.4	45.0	40.0	29.2	53.2
		M	25.8	37.2	47.1	43.5	47.9	44.6	39.8	28.5	52.5
		L	23.3	35.7	46.6	43.1	46.9	43.8	38.8	27.5	51.8
6 Row	40LMA024	H	22.9	33.6	42.0	41.1	46.3	43.0	38.0	27.8	50.0
		M	21.4	32.0	39.8	40.0	45.1	41.8	37.3	26.6	48.7
		L	20.1	29.7	38.3	39.0	44.6	40.4	36.2	25.7	47.8
	40LMA040	H	26.6	38.5	44.9	47.3	48.4	44.8	42.1	33.0	53.2
		M	24.0	37.1	42.9	45.4	47.1	43.3	41.0	31.9	51.6
		L	20.7	35.2	41.2	44.4	46.1	42.1	39.0	29.7	50.4
	40LMA060	H	30.2	37.9	43.5	45.1	49.0	45.9	42.5	32.1	53.2
		M	29.2	36.5	43.3	45.5	47.2	45.4	41.6	31.3	52.2
		L	27.7	35.2	41.6	43.9	45.6	44.3	40.6	30.2	50.7
	40LMA080	H	26.1	39.7	47.7	44.7	49.7	44.7	40.9	29.7	53.7
		M	25.5	38.7	47.3	44.1	49.3	44.1	40.4	29.3	53.2
		L	23.8	38.1	46.0	43.8	48.3	43.5	39.1	28.4	52.3

Note: Sound measurement in accordance with JIS B 8616:2006 Standard (1.5 below the unit bottom) at 8mm ESP

40LMA with AC MOTOR

Model	Voltage	Phase	Hz	Operating Volts *		Motor	
				Max.	Min.	LRA	FLA
40LMA024	240	Single	50	253	207	6.35	2.46
40LMA040						7.76	4.4
40LMA060						12.1	4.55
40LMA080						21	7.4

LRA : Locked Rotor Amps

FLA : Full Load Amps

* Permissible limits of the voltage range at which the unit will operate satisfactorily.

40LMA with EC MOTOR

Model	Voltage	Phase	Hz	Operating Volts *		Motor	
				Max.	Min.	LRA	FLA
40LMA024	240	Single	50	253	207	BDT	1.7
40LMA040						BDT	1.7
40LMA060						BDT	6.57
40LMA080						BDT	6.57

BDT: When motor locked, driver will shut down speed command after 10 seconds.

Typical Motor Power Input Comparison

Model	Motor Power Input Comparison		% Saving
	AC Motor	EC Motor	
40LMA024	614	590	4%
40LMA040	811	715	12%
40LMA060	1140	1030	10%
40LMA080	1680	1060	37%

Note: Data based on unit with 4-rows coil, fan running at high speed with 50 Pa ESP

Furnish and install fan coil units in the location and manner shown in IOM. Units shall be suitable for use with 240 V-1 Ph-50Hz electrical supply.

COILS

Coils shall be rated in accordance with ARI standard 410. The coils shall be tested at 2760kPa air pressure while submerged in water. The coils shall be equipped with manual air bleed/vent valve. The base units shall be completed with 4-row chilled water coil or optional 6-row which equipped with 1" copper connections for both supply and return line. These coils shall be constructed with lanced sine wave aluminium plate fins mechanically bonded to 3/8 (9.5mm) copper tubing with all joints brazed. Optional 1-row hot water heating coil with 1/2" copper connection is fitted inside the unit attached to the Chilled Water coil. This Heating Coil can only be supplied in conjunction with the Chilled Water Coil. This coil shall be constructed with double wavy aluminium plate fins mechanical bonded to 1/2" (12.7mm) copper tubing with all joints brazed. All coils shall be with a nominal 472 fins per meter with copper headers. Coils connection can be chosen for either left or right connection.

CASING

Unit casing construction shall be single skin 1mm thick galvanized steel with internal lined with 25.4mm Polyurethane laminated with aluminium foil. Condensate drain pan shall be painted galvanized steel insulated with 6.4mm thick closed cell polyethylene foam and pitch for positive drainage with unit level. Optional unpainted Stainless steel drain pan with PE insulation is also available. The drain pan connection shall be 3/4" NPT male.

FAN

Fan(s) shall be DIDW forward curved centrifugal type direct driven by a resiliently mounted permanent split capacitor motor.

SERVICEABILITY

The unit shall have a side access panel at coil side providing access to the fan motor and drain tray. The electrical terminal block (including capacitor) shall be mounted on the unit exterior opposite coil side.

SOUND

The unit shall be of quiet operation suitable for typical commercial operation.

FILTER ACCESSORY

The base units shall only be with return air spigot without filter. Optional air filter frame shall be fitted to the unit return air spigot. This add-on filter track shall be capable of receiving the standard 12mm thick frame with EU2 grade media or optional 25mm with higher EU3 grade media. The filter shall be able to be fitted in either left or right hand position (following the coils connection) with side withdrawal of filter as well as front withdrawal.

MOTOR - AC

Fan motor shall be 3 – Speed, 240V, single phase, 50Hz. Permanent split capacitor type with ball type bearings and oversized oil reservoirs to ensure lubrication.

The fan motor shall be equipped with integral automatic temperature reset for motor protection. Motor insulation is class B & IP20 rating enclosure.

MOTOR - EC

Fan motor shall be multi-speed, 240V, single phase, 50Hz. Electronically commuted motor and low energy consumption.

The motor offer higher efficiency and reliability, longer lifetime (no brush erosion) and overall reduction of electromagnetic interferences.

The EC motor are with built-in driver and controller are supplied with the EC motor for constant air flow and low noise. Unit with EC motor is capable to be connected to BMS controller. Motor installation is class B and IP21 rating with open drip proof enclosure.



Carrier International Sdn. Bhd. (3385-T)

Lot 4, Jalan P/6, 43650 Bandar Baru Bangi,
Selangor Darul Ehsan, Malaysia.

Tel: 03-8913 7600